



Established 1984
Trusted by Australia's trade for more than

VALID THROUGH TO MARCH 31 2026

TO TRADEQUIP

WORKSHOP FOURTH

For full product specifications go to www.tqbbrands.com.au



Portable Evaporative Cooler 750W

1035T

240V/50Hz/750W 3 speed motor Max. air flow: 23,000 m3 per hour Effective cooling area: 150-200sqm Water usage:12-18 litres per hour Water tank capacity: 130 Litres 1730H x 1120W x 680Dmm

Weight: 63kg





Synchronous Swing Function

Remote Control Timer Panel

FEATURES & BENEFITS

Moulded polyethylene housing will not crack and is rust & leak proof.
Environmentally-friendly alternative to traditional reverse cycle A/C.
Cools without chemicals or refrigerants.

Long-term dependability.

Near maintenance free operation.

Cools where traditional earling methods.

Cools where traditional cooling methods are impractical or cost-prohibitive. Remote control speed adjustment.

Direct drive. LCD 24 hour timer panel. Easy to read water level sight tube gauge. Dual pour in refill water inlet and/or 3/4" hose fitting for automatic tap refill.

Adjustable water flow & drain valve. Nylon castors for easy portability.



VIEW RANGE HERE **Excludes GST \$1649 Inc. GST \$1813.90**

*Freight Rates May Apply



Product Demonstration online



Portable Evaporative Cooler 750W

1029T TRADEQUIP

MADE FOR THE 240V/50Hz/750W 3 speed motor Max. air flow: 23,000 m3 per hour Water consumption: 20-35 litres per hour

Effective cooling area: 200 260 Effective cooling area: 200-260sqm Cooling area: 200-260m2

Water tank capacity: 200 Litres 1800H x 1600W x 780Dmm Weight: 128kg






Nylon Castors for easy portability



AIR VELOCITY

Remote Control Timer Panel



Moulded polyethylene housing will not crack and is rust & leak proof. Environmentally-friendly alternative to traditional reverse cycle A/C. Cools without chemicals or refrigerants.

Long-term dependability. Near maintenance free operation.

Cools where traditional cooling methods are impractical or cost-prohibitive. Remote control speed adjustment. Direct drive. LCD 24 hour timer panel. Easy to read water level sight tube gauge. Dual pour in refill water inlet and/or 3/4" hose fitting for automatic tap refill.

Adjustable water flow & drain valve. Nylon castors for easy portability.



Portable Evaporative Cooler 550W

Watts

MADE FOR THE

1027T TRADEQUIP

240V/50Hz/550W 3 speed motor Max. air flow: 18,000 m3 per hour Effective cooling area: 100-150sqm

Water consumption: 12-18 litres per hour Water tank capacity: 100 Litres

1510H x 1120W x 680Dmm Weight: 58kg

Synchronous



Remote Control Timer Panel



Excludes GST Inc. GST \$1417.90



Cooler Cover 1035T-CO TO TRADEQUIP

Water-resistant fabric Lightweight and breathable UV treated and Easy to use To protect 1027T, 1028T and 1035T TradeQuip Portable Evaporative Coolers when not in use.





*Freight Rates May Apply

Portable Evaporative Cooler 750W

1035T TRADEQUIP

240V/50Hz/750W 3 speed motor Max. air flow: 23,000 m3 per hour Effective cooling area: 150-200sqm

Water consumption: 12-18 litres per hour Water tank capacity: 130 Litres 1730H x 1120W x 680Dmm Weight: 63kg



Remote Control



Excludes GST Inc. GST \$1813.90



MADE FOR THE

Portable Industrial Spot Cooling Air Conditioners TATRADEQUIP

| | The state of the s | | |
|--------------------|--|-----------------|-----------------|
| Code | 1031T | 1032T | 1033T |
| Power Unit | 240V 50Hz | 240V 50Hz | 240V 50Hz |
| Rated Power | 950W | 2000W | 3000W |
| Mains Plug | 10 Amp | 15 Amp | 15 Amp |
| Cooling Capacity | 2.7KW/9200Btu | 4.5KW/15300Btu | 6.5KW/22200Btu |
| Max. Air Flow | 400m3 p/hr | 800m3 p/hr | 1200m3 p/hr |
| Noise Level | 55dB(A) | 60dB(A) | 65dB(A) |
| Operating Temp. | 18º - 45º C | 18º - 45º C | 18º - 45º C |
| Suction Pressure | 2.5Mpa (Max.) | 2.5Mpa (Max.) | 2.5Mpa (Max.) |
| Discharge Pressure | 4.5Mpa (Max.) | 4.5Mpa (Max.) | 4.5Mpa (Max.) |
| Dimensions | 855Hx430Wx405D | 1035Hx520Wx480D | 1245Hx640Wx560D |
| Excl. GST | \$1399 | \$2555 | \$3999 |
| Incl. GST | \$1538.90 | \$2810.50 | \$4398.90 |



TRADEQUIP INDUSTRIAL AIR CONDITIONERS FEATURES & BENEFITS

Compact yet powerful. Wide operating range of 18°- 45°C.

Single duct system for easy installation. Capillary tube construction for simplicity.

5 Litre self-contained condensation tank for easy removal and emptying.

Heavy duty compressor with automatic restart and short cycle protection.

Motors and compressors have overload protection.

MADE FOR THE

Durable and long lasting steel construction.


Heavy duty locking castors and handles for easy manoeuvrability.

Easy to use plug in and place the hot air duct out of window/door or into false ceiling.

TradeQuip "Made for the Trade"
Portable Air Conditioners offer a quick spot cooling solution with strong air flow and easy installation.



Excludes GST \$1399 Inc. GST \$1538.90

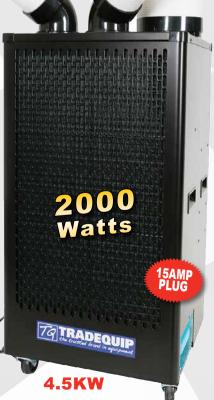



Industrial Pedestal Misting Fan 650mm

1182T TRADEQUIP

240V/50Hz/230W 3 speed motor 90° Oscillation

Water shortage protection.

Drop the temperature: 2-8°C

Adjustable mist-Exit Vol: 0-16KG/Hr Effective spray distance: 8-10mtr

Suitable for cooling people, stockbreeding

or greenhouse applications.





FEATURES

Great for workshops and factory floor areas Adjustable height to 1.8m and 3 speed

operation.

Large water storage tank & integrated water reservoir.

No mess drip water collector.

Heavy duty base for safety and stability. Low pressure water pump for reliability and

Automatic shut-off when water tank is empty.



Industrial Wall Mounted Fan 750mm

1026 TRADEQUIP

240V/50Hz/280W 3 speed motor 750mm cast alloy 3 blade fan 0° to 90° oscillating angle Air flow: Up to 300m3/min Noise level: 86dB(A)



Cast aluminium 3 spoke fan blade.

Metal oscillating gears.
Heavy duty wall mounting bracket

Adjustable tilt and High air flow.

FEATURES

aluminium blade



Includes sturdy wall mount bracket

Chrome steel cade

Industrial Pedestal Fan 750mm

1015 TRADEQUIP

240V/50Hz/280W 3 speed motor 750mm aluminium 3 blade fan Adjustable height: 1235-1760mm (Blade centre)

0° to 90° oscillating angle or fixed Air flow: Up to 300m3/min

aluminium

Chrome steel cage

FEATURES

Rugged and dependable Direct drive motor requires less power and less maintenance compared to other motors.

Durable all-metal construction with black finish, chromium (finger safe) steel grille.

Aerodynamically balanced 3 spoke aluminum blades for maximum airflow and motor efficiency.

Adjustable tilt to direct air where you need it. Cast Iron heavy duty ba Metal oscillating gears. Iron heavy duty base for stability.

Cast Iron heavy duty base for stability



Industrial Portable Floor Fan 450mm

1045 TATRADEQUIP

240V/50Hz/220W 3 speed motor 450mm steel 3 blade fan Adjustable flow angle Air flow: 142sqm per min Noise level: 69dB(A)



Inc. GST \$181.50

FEATURES

The enclosed direct drive motor is protected from dust and debris to provide ye reliable service.

The 3-speed switch gives you control over the airflow, and vertical tilt helps you control angle. Solid metal construction with durable

Chrome steel cage

Industrial Ventilation Fans

TRADEQUIP

| Code | 1025 | 1056 | 1141T | | |
|-----------------|--------------------------|----------------|-----------------|--|--|
| Fan Diameter | 300mm | 400mm | 450mm | | |
| Voltage | tage 240V 50Hz 240V 50Hz | | | | |
| Power | er 520W 1100W | | | | |
| Speed | 2800rpm | 2800rpm | 2800rpm | | |
| Noise Level | 92db2 (A) | 92db2 (A) | 92db2 (A) | | |
| Air Delivery | 60m3per minute | 96m3per minute | 162m3per minute | | |
| Static Pressure | 343Pa | 700Pa | 972Pa | | |
| Excl. GST | \$295 | \$735 | \$869 | | |
| Incl. GST | \$324.50 | \$808.50 | \$955.90 | | |

FEATURES

These TradeQuip "Made for the Trade" Industrial Ventilator Fans air out rooms, circulate air or dry wet areas with a powerful air output of 60m³ per minute. Features include an ergonomic handle for effortless transport and an aluminium blade with steel housing construction for long lasting durable performance. Complete with 5 metre flexible ducting

WARNING: NOT INTENDED FOR DUST EXTRACTION



MADE FOR THE

Also available separately
5m Flexible Ducting 300, 400 & 450mm diam.
10m Flexible Ducting 300mm diameter only

PRODUCT SUPPORT

Go to our TQB Brands Website for extensive product support & regular information updates.

For a comprehensive guide to your TQB Brands product Maintenance, Setup and **Demonstration**



Scan code to go to TQB Brands Youtube Channel



Air/Hydraulic Bottle Jack Bleeding Video

12K views • 1 year ago



Hydraulic Bottle Jack Bleeding Video

17K views • 1 year ago



TradeQuip Diesel/Kerosene Workshop Heaters

5K views • 3 years ago



TradeQuip 2020 Evaporative Cooler Range

2.7K views • 1 year ago

ESHOOTIN







PARTS WASHERS (2)



Scan code to go to **TQB Brands Troubleshooting** Documents









PORTA POWERS & PANEL REPAIR (1)

MOTORCYCLE LIFTERS (0)





STANDS, RAMPS & DOLLIES (1)



TROLLEYS & CREEPERS (O)



WHEEL & SUSPENSION TOOLS (O)



Scan code to go to our Top Tips guides and learn how to extend the life of your TQB Brands equipment

Visit our webpage www.tgbbrands.com.au for instructional & pre-start videos.





Scissor Lift Workshop Trolley 225KG

6010T TRADEQUIP

Safe working capacity: 225kg Working height: 225mm-710mm Table size: 708L x 450Wmm

Inc. GST \$504.90

MADE FOR THE TRADE

FEATURES

Hands free foot-operated pedal. Quick release hand lever for easy, controlled release. Heavy duty oil-resistant nonslip mat. Powder coated all steel construction Perfect for moving parts to vehicles.



Scissor Lift Workshop Trolley 500KG

6009T TRADEQUIP

Safe working capacity: 500kg Working height: 265mm-865mm Table size: 820L x 520Wmm

MADE FOR THE TRADE

FEATURES

Hands free foot-operated pedal. Quick release hand lever for easy, controlled release Heavy duty oil-resistant nonslip mat. Powder coated all steel construction Perfect for moving parts to vehicles.



Scissor Lift Workshop Trolley 300KG

6008T TRADEQUIP

Safe working capacity: 300kg Working height: 350mm-1285mm Table size: 820L x 520Wmm

MADE FOR THE

GST \$1153.90

DOUBLE SCISSOR HIGH

CAPACITY 300KG

FEATURES Hands free foot

operated hydraulic pedal.

Heavy duty oil-resistant nonslip mat. Powder coated all steel construction Perfect for moving parts to vehicles.



Scissor Lift Workshop Trolley 450KG

6003T TRADEQUIP

Safe working capacity: 450kg Working height: 280-875mm Table size: 500 x 810mm

Wheel Diameter: 125mm Dimensions: 1140L x 515W x 995Hmm

Hands free foot-operated hydraulic pedal. Quick release hand lever. Heavy duty oil-resistant nonslip mat. Powder coated all steel construction Perfect for moving heavy parts to vehicles.



Scissor Lift Workshop Trolley 500KG

6007T TRADEQUIP

Inc. GST \$1021.90

Safe working capacity: 500kg Working height: 440-1575mm Table size: 1010L x 520Wmm Wheel diameter: 150mm Dimensions: 1130L x 520W x 1260Hmm

MADE FOR THE

FEATURES

Double Scissor High Lift Foot-operated hydraulic pedal keeps vour hands free. Quick release hand lever for easy, controlled hydraulic release. 2 locking heavy duty swivel castors.
All steel construction. Powder coated for extra protection.

HANDLE

Perfect for moving heavy parts to and from the vehicle.



DOUBLE SCISSOR HIGH

CAPACITY 500KG



Inc. GST \$1868.90

AUXILIARY SUPPORT/LIFTING

Transmission Saddle Upgrade

Fits following TQB Brands models: PROTL1000: PROTL500: 2063T: 2022T Transmission Lifter Shown in images sold separately Rated maximum capacity: 1,000kg (See your transmission lifter's capacity) Lifting platform size: 160x145mm (475x465mm Max.)

Forward tilt: 11° Rearward tilt: 11° Left tilt: 9° Right tilt: 11 Weight: 19kg

FEATURES





cantilevered handles allow for faster adjustments over standard saddle design resulting in higher efficiencies.

The four ratcheting securing pins are easily and quickly adjustable making transmission lifting safer & more secure.

Two tie-down straps included to safely secure the transmission to the saddle.

Four rounded tie-down points and holes in securing pins allow for added level of customisation to secure the load. One removable saddle pin allows for accommodation of longer gearboxes Compatible with and for use on selected TQB Brands Transmission Lifters Only

for professional quality and durability

The enlarged threaded rods paired with









Inc. GST \$438.90



Underhoist Auxiliary Stand 680KG

1198T TRADEQUIP

Safe working capacity: 680kg Height: 1370-2045mm Base diameter: 300mm Weight: 16.5kg



FEATURES

Fast and safe technology for professional mechanics.

Heavy gauge steel frame prevents distortion or twisting.

Provides partial support for components -NOT designed to support the vehicle. Foot pedal allows easy load movement

and hand free operation.

Quick action adjustable height mechanism. Sold individually recommended only to be used individually.

Inc. GST \$218.90

MADE FOR THE

Hands free foot pedal operation

Auxiliary Lifter 500KG 2058T Tradequip The trusted draw in equipment

Rated capacity: 500kg Working height: 1175-1985 mm Lifting platform size: A: 362 x 362mm

FEATURES

B: Φ 107.5mm

This **TradeQuip "Made for the Trade"** 500kg Auxiliary Lifter is the perfect underhoist aid during removal and installation of small components. It features a mounting cradle and lift pad and a manually operated hydraulic system with smooth hydraulic lift and descent. The hydraulic system also includes

a bypass system to prevent over extension and accidental overloading.

Inc. GST \$537.90

NOT INTENDED FOR SUPPORTING LOADS
AND NOT INTENDED
AS STAND ALONE
TRANSMISSION LIFTER

MADE FOR THE

MADE FOR THE TRADE

Includes

Cradle and

Lift Pad

В

Includes Cradle,

Lift Pad &

Fuel Tank Adaptor

Auxiliary Lifter Kit 500KG

2068T TRADEQUIP

Rated capacity: 500kg Working height: 1175-1985 mm Lifting platform size: A: 362 x 362mm

В: Ф 107.5mm C: 812 X 352mm

Inc. GST \$746.90

NOT INTENDED FOR SUPPORTING LOADS
AND NOT INTENDED
AS STAND ALONE
TRANSMISSION LIFTER









BORUM BOTTLE JACK FEATURES
Manufactured of superior-grade steel and built
to exacting standards for quality and durability.
Lead-free paint finish is oil, grease and dirt-resistant.
Built-in by-pass device protects hydraulic system.
Compact, powerful Air Turbo Motor.
High quality large diameter hydraulic steel cylinder.
Precision machined, chrome plated and polished piston-ram.
Versatile "quick connector" for easy removal of air hose.



Air/Hydraulic Bottle Jack 20,000KG

BTSJ20TB /= BORUM Safe working capacity: 20,000kg Working height: 262 - 504mm Hydraulic lift: 163mm Op. air pressure: 110-125psi Air inlet fitting: 1/4" Weight: 16kg

Excludes GST

Inc. GST \$383.90 MODEL RUNDUT



Air/Hydraulic Bottle Jack 20,000KG

BWBBJ20T F= BORUM Safe working capacity: 20,000kg Working height: 263 - 503mm Hydraulic lift: 160mm Adjustable height: 80mm Base area: 200x152mm



Air/Hydraulic Bottle Jack 30,000KG BWBBJ30T /= BORUM

Safe working capacity: 30,000kg Working height: 275 - 532mm Hydraulic lift: 162mm Adjustable height: 95mm Base area: 229x180mm

Op. air pressure: 90-120psi INDUSTRIAL

WELDED BASE

Excludes GST



Air/Hydraulic Bottle Jack 35,000KG

BBJ35TA Z= BORUM Safe working capacity: 35,000kg Working height: 264 - 414mm Hydraulic lift: 150mm Operating air pressure: 110-125psi Air inlet fitting: 1/4 Weight: 29kg

Excludes GST Inc. GST \$581.90

1₀00 OKC INDUSTRIAL QUALIT

FEATURES OF TQ Pro BOTTLE JACKS
Using CNC technology, TQ Pro products
are constructed using superior-grade steel
and built to premium TQ Pro standards

capac

for professional quality and durability.

Trusted by serious prof
Premium quality large diameter hydraulic steel cylinders are machi
then treated and polished to minimise wear and extend service life.

Incorporating the latest technology in aggressive wiper seals and OD exclusion, the high capability premium quality seal systems efficiently protect internal hydraulics keeping it free from dirt, mud,

prefinition quality sear-systems of the water, and other contaminants.

A lead-free paint finish is applied after a thorough chemical wash to ensure a long-lasting premium finish with a final coat that is oil, grease and dirt-resistant for easy cleanup.

Air/Hydraulic Bottle Jack 20,000KG

PROBJ20TA

Safe working capacity: 20,000kg Working height: 261.5-525mm Hydraulic lift: 156mm Adjustable lift: 95mm Operating air pressure: 110-125psi Air inlet fitting: 1/4" Base: 230 x 150 x 30mm Weight: 19kg

PRO

Excludes GST Inc. GST \$493.90

Professional Reputable Outstanding

Air Actuated Bottle Jack

WELDED

Excludes GST

Inc. GST \$493.90

Squat 20,000KG PROBJ20TAS

Safe working capacity: 20,000kg Working height: 185-330mm Hydraulic lift: 80mm Operating air pressure: 110-125psi

Adjustable height: 61mm Air inlet fitting: 1/4" Base: 230 x 150 x 30mm Weight: 16kg

LATEST APPLIED TECHNOLOGIES PRO

Professional Reputable Outstanding



Air/Hydraulic Bottle Jack 30,000KG

PROBJ30TA Safe working capacity: 30,000kg Working height: 279.5-533mm Hydraulic lift: 155mm Op. air pressure: 110-125psi Air inlet fitting: 1/4" Base: 250 x 180 x 40mm

LATEST APPLIED TECHNOLOGIES

Professional Reputable Outstanding

Excludes GST Inc. GST \$647.90







BOTTLE JACKS





Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance. Fabricated from hard-cast steel with heat-treated critical

Unique cross-type forged release valve ensures positive load control.

Overload protection Hydraulic system is protected from internal damage by a by-pass mechanism. High quality glide-action pressure pump. Supplied with 500mm pump handle

| Code | 2012 | 2013 | 2014 | 2015 | 2016 | |
|---------------------|----------|-----------|-----------|-----------|-----------|--|
| Capacity | 10,000kg | 15,000kg | 20,000kg | 12,000kg | 20,000kg | |
| Hydraulic Lift | 125mm | 125mm | 145mm | 85mm | 115mm | |
| Adjustable Height | 70mm | 70mm | 60mm | 50mm | 75mm | |
| Min. Height 205mm | | 227mm | 245mm | 180mm | 200mm | |
| Max. Height | 400mm | 447mm | 450mm | 315mm | 390mm | |
| Base Area 124x124mm | | 148x136mm | 167x156mm | 157x134mm | 167x156mm | |
| Excl. GST | \$109 | \$132 | \$169 | \$129 | \$169 | |
| Incl. GST | \$119.90 | \$145.20 | \$185.90 | \$141.90 | \$185.90 | |

Air/Hydraulic Bottle Jack 12,000KG

TQBJ12TA TO TRADEQUIP Safe working capacity: 12,000kg Working height: 260-510mm Adjustable screw: 80mm Work pressure: 110-125psi Hydraulic stroke: 170mm Air inlet fitting: 1/4"

FEATURES

Compact powerful Air Turbo motor.
Versatile "quick connector provides 'quick & easy air connection. Two piece pump handle. Convenient welded carry handle.

Excludes GST Inc. GST \$240.90

MADE FOR THE TRADECUI BOTTLE JAC 000

Air/Hydraulic Squat Jack 20,000KG TQBJ20TAS TRADEQUIP

Safe working capacity: 20,000kg Working height: 178-328mm Adjustable screw: 63mm Work pressure: 110-125psi Hydraulic stroke: 87mm

> Excludes GST Inc. GST \$339.90

Air inlet fitting: 1/4"



000kg apacity

Air/Hydraulic Bottle Jack 20,000KG

2026T TRADEQUIP Safe working capacity: 20,000kg Working height: 265-510mm Hvdraulic lift: 170mm (265mm to 435mm) Adjustable height: 75mm (max. height 510mm) Base area: 224x134mm Work pressure: 90-120psi Weight: 16kg

FEATURES

Compact powerful Air Turbo motor. Versatile "quick connector provides quick & easy air connection. Two piece pump handle. Convenient welded carry handle

Inc. GST \$317.90



Air Actuated Super Low Profile Jack 20,000KG

2051T TRADEQUIP

Safe working capacity: 20,000kg Working height: 148-259mm Screw extension height: 45mm Operating air pressure: 100-145psi Hydraulic stroke: 66mm Air inlet fitting: 1/4"

FEATURES

Compact powerful Air Turbo motor. Versatile "quick connector provides 'quick & easy air connection. Chrome plated rams.
Convenient welded

carry handle

DEQUIP

MADE FOR THE

Inc. GST \$416.90

11

Wheel Tyre Lifter 1055T Tradeque the trusted from in equipment

Safe working capacity: 50kg Rollers moving distance: 125mm Roller diameter & length: (D) 76.2 x 240mm Rollers push force: <4kg based on 50kg load Lifting handle force: 1kg based on 50kg load

Overall height: 1380mm Overall base dimensions: 725W x 872D mm

Roller working range: 100mm to 1060mm

Front castors: 2(D) 75 x 24mm Rear castor - Locking: 2(D) 75 x 24mm

Weight: 51.25kg

TRULY MOBILE... NO ADDITIONAL AIR LINE OR CHARGING CABLES MEEDED

FEATURES

Braked Swivel Castor. Sturdy Frame to safely transport wheel around workshop.
Adjustable Safety Brace.

Inc. GST \$1196.80

castors

MADE FOR THE

activated by an air or batteryoperated ratchet wrench from

the top of the unit. Nut & bolt storage tray

TATRADEQUIP

The lifters drive screw can be

Adjustable arms Adjustable arms.
Equipped with rollers for easy positioning.
Stop rollers on the rear side.
Ergonomic handle with rounded & soft safety grip.

Wheel Dolly Single 250KG

B250WH = BORUM

Safe working capacity: 250kg Maximum depth: 305mm Overall height: 1000mm Weight: 14kg

FFATURES

INDUSTRIAL

This BORUM WHEEL DOLLY is a sturdy & handy transport aid for various types of wheels (trucks, vans, utes and cars). This versatile and easy to operate piece of equipment features adjustable arms. Equipped with two wheels and an ergonomic handle, the units manoeuvrability is not hampered by the size of the wheel.

> Excludes GS Inc. GST \$455.40





Capacit

adjustable rollers

For the lifting, lowering, supporting & transporting of tyre & rim assemblies up to 50kgs & 300mm wide.

Clutch Jack 130kg BCJ130 /= BORUM

Safe working capacity: 130kg Height: Min. 288mm, Max. 980mm Chassis: 1041 x 609mm 1 x 2" Alignment Spline

Included (10 Tooth)
1 x 1-3/4" Alignment Spline Included (10 Tooth)



Inc. GST \$1868.90

FEATURES

Designed for lifting, lowering & installing/removing heavy vehicle clutch/flywheel assemblies. Industrial-grade steel frame. High quality hydraulic steel cylinder. Industrial hydraulic system. Rugged heavy industrial wheels and full swivel ball castors. User-friendly rotating handle. Paint is oil, grease and dirtresistant for easy cleanup. Two 10-tooth alignment splines included store on chassis.

> NDUSTRIAL GUALIT

Truck Wheel Lifter BTWD750 F= B O R U M

Safe working capacity: 750kg Lift arm spread: 533-635mm Lifting range: 60-275mm Tilt range: -2.5 to 10 degrees 787L x 1092W x 895H mm

INDUSTRIAL

Inc. GST \$1098.90



Suitable for Buses

Car and 4WD Jack Stands

TRADEQUIP the trusted brand in equipment

FEATURES

Constructed of high-grade steel & built to exacting standards for quality & durability. Lead-free paint finish is oil, grease and dirtresistant for easy cleanup.

Quick action adjustable height mechanism.

Quick action adjustable height mechanism Double-lock safety pin design for extra safety and security. (1128T & 1148T). Welded steel frame & cast iron support. Adjustable height.

Adjustable height. Reinforced shaft for added strength stability. Sold in pairs and only recommended to be used in pairs.



| Code | 1128T | 1148T | 1162T |
|-------------|-----------|-----------|-----------|
| Load limit | 2,000kg | 4,000kg | 8,000kg |
| Min. Height | 285-428mm | 395-605mm | 468-715mm |
| Base Area | 206x186mm | 287x252mm | 324x294mm |
| Excl. GST | \$105 | \$181 | \$309 |
| Incl. GST | \$115.50 | \$199.10 | \$339.90 |



Garage Jack 3,000KG Low Profile

2906T TRADEQUIP

Working load limit: 3,000kg Height: 118 - 488mm Handle length: 1400mm

Front wheels: 90mm dia 40mm width Rear castors: 60mm dia 25mm width

Saddle diameter: 115mm Dimensions: 670L x 380W x170Hmm

Weight: 43kg

FEATURES

Low profile and deep reach.
Heavy gauge steel construction.
1400mm long handle for deeper reach.
Quick Lift Dual Pump technology.
Internal bypass valve overload protection.
Lead-free paint finish to ensure a longlasting finish and prevent rust.
Paint is oil, grease and dirt-resistant.
Protective foam handle cover prevents
vehicle damage.





MADE FOR THE





HEAVY GAUGE

488mm

max. lift

height

Mechanics Creeper 130KG

1023T TRADEQUI

Safe working capacity: 130kg 1010L x 475W x 115Hmm





FEATURES

The creeper body is manufactured to "Made for the Trade" qualifly using a high-impact polymer material that resists impacts, won't rust and is easy to clean. Comfortable padded headrest this low-profile creeper is one of the lightest and most durable available.

Convenient tool trays on each side

Ratcheting Positioning Jacks

1054T TRADEQUIP

Safe working capacity: 680kg each Max. distance between rollers: 710mm Min. distance between rollers: 340mm Suits tyres up to: 280mm (W) Swivel castors: 100mm

MADE FOR THE TRADE

Heavy duty nylon swivel castors



\$469 Inc. GST \$515.90 pair

FEATURES

Steel construction with metal rollers

Heavy duty nylon swivel castors.

Easy foot-pedal lifting design.

2 jacks permit full 180° vehicle pivot.

4 jacks place vehicle on a 360° rolling platform.

Lead-free paint finish helps prevent rust and is oil, grease and dirt-resistant for easy cleanup. Quick action adjustable height mechanism.

Sold &recommended only to be used in pairs.

Easy foot pedal lift

Vehicle Positioning Rack

1054T-R TRADEQUIP

1054T Storage capacity: 1 on ground, up to 3 vertically

Distance between spigots: 170mm Overall footprint: 605 x 130 x 145mm Weight: 2.4kg



FEATURES

Steel Construction with metal chocks to lock rollers into place.
Rack is designed to connect to 1 x 1054T &

can have up to 3 x 1054T stored vertically. Heavy duty locking pin secures rack to 1054T Vehicle Positioning Jack. Lead-free paint prevents rust & is oil, grease and dirt-resistant for easy cleanup. Sold separately and only to be used on TradeQuip 1054T Vehicle Positioning Jacks



\$85 Inc. GST \$93.50

Air Actuated Truck Jack 35,000KG

BTJ35TA /= BORUM

Safe working capacity: 35,000kg

Lift range: 255-633mm Hydraulic lift: 155mm Adjustable height: 123mm Adaptors: 21, 61, 100mm Handle length: 1110mm

Operating air pressure: 110-125psi Chassis: 555L x 255H x 295Wmm

FEATURES

Pro quality rugged steel construction. Wear-resistant quality sealing O-rings. Strong hydraulic pump & 3-position

Temperature-resistant hydraulic oil.
Treated and polished piston and ram. Built-in bypass hydraulic safety

Overload.
Compact design and Quick Lift ram.
Convenient & efficient height adaptors.
High quality lead-free paint.



35.000KG

Air Actuated Jack 2 Stage 15,000/30,000KG

BTJ1530TA /= BORUM

1st stage: 30,000kg safe working capacity 2nd stage: 15,000kg safe working capacity First stage hydraulic lift: 73mm Second stage hydraulic lift: 66mm

Operating air pressure: 145-175psi Height: 150-409mm Adaptors: 45 and 75mm

Handle length: 1300mm Chassis: 480 x 290 x 150mm

FFATURES

Double sealing function using XTP industry sealing.
Telescopic air actuation lift (air-

hydraulic pump).

Long T-handle lets you easily position

your jack under vehicle.
Self-returning lower & lift switch .
Internal and external cylinders hard chromed.

High manoeuvrability & deep reach under vehicles.

2 extension adaptors/saddle plates Large rubber wheels.

INDUSTRIAL GUALITY

Excludes GST Inc. GST \$2726.90

> Includes Height Adaptors



Air Actuated Truck Jack 50,000KG

BTJ50TA PAR D R U M

Safe working capacity: 50,000kg Lift range: 287-650mm Hydraulic lift: 153mm Adjustable screw: 110mm Adaptors: 20, 60, 100mm Handle length: 1230mm Operating air pressure: 110-125psi Chassis: 525L x 288H x 325Wmm



Inc. GST \$1846.90

50.000KG

Includes Height Adaptors



BTJL2040TA Z BORUM

1st stage: 40,000kg safe working capacity 2nd stage: 20,000kg safe working capacity Lift range: 150-295mm (no adaptors) 1st stage hydraulic lift: 77mm

2nd stage hydraulic lift: 68mm Adaptors: 10, 35, 65mm Operating air pressure: 100-145psi

Handle length: 1290mm Chassis: 543L x 291Wmm

Wear-resistant quality sealing O-rings

Strong hydraulic pump.
Temperature-resistant hydraulic oil.

Treated and polished piston and ram. Built-in bypass hydraulic safety

Quick Lift lifting ram comes in contact with the load faster.

Convenient & efficient height

3-position pumping handle. High quality lead-free paint

FEATURES

overload system.



INDUSTRIAL QUALIT

> Includes Height Adaptors

LIFTS 40.000KG

Pro quality rugged steel construction. Wear-resistant quality sealing O-rings. Strong hydraulic pump & 3-position handle. Temperature-resistant hydraulic oil. Treated and polished piston and ram.
Built-in bypass hydraulic safety overload.
Compact design and Quick Lift ram. Convenient & efficient height adaptors High quality lead-free paint

Air Actuated Truck Jack 30,000KG

BTJ30TA /= BORUM

Safe working capacity: 30,000kg Lift range: 360-772mm Hydraulic lift: 267mm Adaptors: 45 & 100mm Handle length: 1370mm Operating air pressure: 145-175psi Chassis: 840L x 360H x 282Wmm





Includes Height Adaptors

Air Actuated Truck Jack 60,000KG BTJ60TA /= BORUM Safe working capacity: 60,000kg

Lift range: 420-1031mm Hydraulic lift: 311mm Adaptors: 100 & 200mm

Handle length: 1290mm Operating air pressure: 145-175psi Chassis: 910L x 420H x 300Wmm



FEATURES

Double sealing function using XTP industry sealing.

Telescopic air actuation lift. Self-returning lowering and lifting switch.
Internal & external cylinders hard chromed Long T-handle for high manoeuvrability & deep reach under vehicles.

Designed for extremely high axles



Includes Height Adaptors

60.000KG

FEATURES

XTP industry double sealing function using Telescopic air actuation lift.
Self-returning lowering and lifting switch.

Internal & external cylinders hard chromed Long T-handle for high manoeuvrability & deep reach under vehicles Designed for extremely high axles











Air Actuated 2 Stage Truck Jack 10,000/25,000KG

BTJ1025TA = BORUM

Stage 1: 25,000kg safe working capacity Stage 2: 10,000kg safe working capacity

Lift range: 185-497mm

Hydraulic lift: Stage1: 97mm, Stage2: 95mm

Adaptors: 45, 75mm Handle length: 1380mm

Operating air pressure: 145-175psi

Chassis: 770L x 282H x 185Wmm



Includes Height Adaptors

Double sealing function - XTP industry sealing Telescopic air actuation lift. Self-returning lowering and lifting switch.
Internal & external cylinders hard chromed

Long T-handle for high manoeuvrability & deep reach under vehicles.

FEATURES



LIFTS

25.000KG

Air Actuated 2 Stage Truck Jack 25,000/50,000KG

BTJ2550TA = BORUM

Stage 1: 50,000kg safe working capacity Stage 2: 25,000kg safe working capacity

Lift range: 215-564mm Hydraulic lift: Stage1: 115mm, Stage2: 114mm

Adaptors: 45, 75mm

Handle length: 1380mm Operating air pressure: 145-175psi Chassis: 805L x 282H x 215Wmm

INDUSTRIAL OUALIT

50.000KG







GST \$4068.90

Height

Double sealing function - XTP industry sealing. Telescopic air actuation lift. Self-returning lowering and lifting switch.
Internal & external cylinders hard chromed Long T-handle for high manoeuvrability & deep

Air Actuated 3 Stage Truck Jack 10,000/25,000/50,000KG

BTJ102550TA = BORUM

Safe working capacity: Stage 1: 50,000kg Stage2: 25,000kg, Stage3: 10,000kg Lift range: 160-472mm Hydraulic lift: Stage1: 62mm Stage2: 61mm, Stage3: 69mm Adaptors: 45, 75mm Handle length: 1380mm

Operating air pressure: 145-175psi Chassis: 825L x 282H x 160Wmm



50.000KG



FEATURES

Double sealing function using XTF industry sealing.
Telescopic air actuation lift

Self-returning lowering and lifting switch.
Internal & external cylinders hard chromed
Long T-handle for high manoeuvrability & deep reach under vehicles



Air Actuated 3 Stage Truck Jack 20,000/40,000/60,000KG

BTJ204060TA = BORUM



First stage: 60,000kg safe working capacity Second stage: 40,000kg safe working capacity Third stage: 20,000kg safe working capacity First stage hydraulic lift: 57mm

Second stage hydraulic lift: 59mm Third stage hydraulic lift: 61mm

Height: 150-447mm Adaptors: 45 and 75mm

Operating air pressure: 145-175psi Handle length: 1380mm

Chassis: 875 x 295 x 150mm



Includes Height Adaptors

Inc. GST \$4508.90

80,000KG

Double sealing function using XTP industry sealing Telescopic air actuation lift (air-hydraulic pump). Long T-handle lets you easily position your jack

Self-returning lowering and lifting switch Internal and external cylinders hard chromed .
High manoeuvrability & deep reach under vehicles 2 extension adaptors / saddle plates.
Large rubber wheels.



Air Actuated 2 Stage Truck Jack 50,000/80,000KG

BTJ5080TA PAR DRUM

First stage: 80,000kg safe working capacity Second stage: 50,000kg safe working capacity

First stage hydraulic lift: 111mm Second stage hydraulic lift: 102mm Height: 230-563mm

Adaptors: 45 and 75mm Operating air pressure: 145-175psi Handle length: 1300mm

Chassis: 930 x 340 x 230mm



Inc. GST \$5058.90



Includes Height Adaptors

FEATURES

Double sealing function using XTP industry sealing. Telescopic air actuation lift (air-hydraulic pump). Long T-handle lets you easily position your jack

under vehicle. Self-returning lowering and lifting switch. Internal and external cylinders hard chromed .
High manoeuvrability & deep reach under vehicles. 2 extension adaptors / saddle plates Large rubber wheels.

Air Actuated Truck Jack 22,000KG

B2003T Z= BORUM

Safe working capacity: 22,000kg Lift range: 210-525mm Hydraulic lift: 120mm Adjustable height: 105mm Handle length: 1075mm Air supply: 100-120psi Wheel diameter: 175mm Adaptors: 20, 50, 100mm Chassis: 500L x 215H x 320Wmm











FEATURES

Solid heavy duty construction.
Advanced technology sealing rings.
Fast motion super duty air pump.
Temperature-resistant hydraulic oil. Treated and polished piston and ram. Built-in bypass hydraulic safety overload system Compact design easily fits dual tandem

axles.
Convenient & efficient height adaptors.

3-position pumping handle. High quality lead-free paint is oil, grease and dirt-resistant finish for easy cleanup.

Air Actuated Truck Jack 22,000KG

2004T TRADEQUIP

Safe working capacity: 22,000kg Lift range: 225-552mm Hydraulic lift: 124mm Adjustable height: 103mm Chassis: 560L x 230H x 320Wmm Adaptors: 21, 60, 100mm Handle length: 1160mm Wheel diameter: 200mm



Excludes GST Inc. GST \$801.90

FEATURES

Trade quality rugged steel construction. Wear-resistant quality sealing O-rings. Strong hydraulic pump. Temperature-resistant hydraulic oil Treated and polished piston and Quick lift ram.

Built-in bypass hydraulic safety overload system. Compact design easily fits dual tandem axles. Convenient & efficient height adaptors.

3-position pumping handle.

High quality lead-free paint is oil, grease and dirtresistant finish for easy cleanup

Air Actuated Truck Jack 20,000KG PROTRJA20T

Safe working capacity: 20,000kg Working height: 215-541mm Hydraulic Lift: 141mm Adjustable screw: 85mm Adaptors: 20, 50, 100mm Handle length: 1335mm Operating air pressure: 145-175psi Chassis: 520L x 215H x 258Wmm



Inc. GST \$1483.90



SELF. RETURNING

Professional

Reputable

Outstanding

Includes

Height

Adaptors

FEATURES

Double sealing using XTP industry sealing Telescopic air actuation lift (air-hydraulic pump) Long T-handle lets you easily position your jack under vehicle

Self-returning lowering and lifting switch.
Internal and external cylinders hard chromed.
High manoeuvrability & deep reach. 3 extension adaptors/saddle plates

Air Jack Support Stand 10,000KG BSJ10T F BORUM

Safe working capacity: 10,000kg Height: Min. 536mm - Max. 1298mm Hydraulic lift: 292mm Base diameter: 339mm Rated air pressure capacity: 200psi Weight: 91kg

Inc. GST \$1483.90



FFATURES

The BORUM Industrial AIR JACK/SUPPORT STAND 10,000KG is a reinforced pin style jack and stand with industrial quality design and support bracing system to sustain heavy loads up to 10,000kg. Adjusts to match the job with a 536mm minimum height, 292mm of hydraulic lift and up to 1298mm maximum height using the extension tube!!

Featuring Heavy-Duty Industrial design, this tough air jack/support stand is ideal for truck, bus, farm, earthmoving equipment and fleet vehicle maintenance workshop use.





"NON-SKID BASE" - 4 ply pads of rubber grips are bolted and glued to the 6mm steel floor plates and they will not skid ahead of

Replaces need for a pit or hoist, and at a fraction of the cost and floor space



SOLD INDIVIDUALLY

| Code | 15TJSSHORT | 15TJS |
|------------|-------------|------------|
| Load limit | 15,000kg | 15,000kg |
| Height | 446 - 631mm | 645-1077mm |
| Base Area | 300x300mm | 460x460mm |
| Excl. GST | \$439 | \$529 |
| Incl. GST | \$482.90 | \$581.90 |
| Code | 25TJSSHORT | 25TJS |
| Load limit | 25,000kg | 25,000kg |
| Height | 415 - 539mm | 680-968mm |
| Base Area | 300x300mm | 460x460mm |
| Excl. GST | \$539 | \$599 |
| | | |



FEATURES

Manufactured from high-grade steel and built to exacting standards for quality and durability.
Lead-free paint finish is oil, grease and dirt-resistant for easy cleanup. High strength locking pin.
Controlled pin holes for easy height adjustments.
Turned post slide for easy quick

adjustments.
Heavy-gauge steel gusseted uprights prevent distortion or twisting.

Rugged base provides plenty of stability.

Conveniently located carry handle. Sold individually. (not in pairs)



Auxiliary Stand 7,000KG

BAUXS7T /= BORUM Safe working capacity: 7,000kg Working height: 1295-1905mm Adjustable pin heights: 8 (75mm increments) Base: 300x300x300mm

Weight: 65kg **FEATURES**

Heavy duty design and support bracing system to sustain heavy

vehicle loads.

Manufactured from high-grade steel and built to exacting standards for quality and durability.
Fitted with spring loaded castor

wheels to ensure easy movement around the workshop Fitted with spring loaded support

beam Lead-free paint finish is applied Lead-ree paint finish is applied after a thorough chemical wash to ensure a long-lasting finish and to help prevent rust. Paint is oil, grease and dirtresistant for easy cleanup. High strength locking pin.

Controlled pin holes for easy height adjustments. Turned post slide for easy quick adjustments.





Spring loaded castor wheels



Support Stand 10,000KG 10TSS /= B O R U M

Safe working capacity: 10,000kg Working height: 720-1190mm Adjustable pin heights: 10 Saddle dimensions: 150x80mm Base: 406 x 556mm Weight: 23.5kg

FEATURES

Stable 4 legged stability. Lead-free paint is oil, grease and dirt-resistant for easy cleanup. High strength locking pin & controlled pin holes for easy height adjustments. Turned post slide for easy adjustment.

*10TSS/10TSSHORT SOLD INDIVIDUALLY

Support Stand SHORT 10,000KG /= BORUM

10TSSHORT

Safe working capacity: 10,000kg Working height: 480-780mm Adjustable pin heights: 6 Saddle dimensions: 150x80mm Base: 310 x 310mm Weight: 18kg

Excludes GST Inc. GST \$405.90

10 Metric Sizes:

Weight: 14kg

Inc. GST \$456.50

INDUSTRIAL

QUALITY

0000 <u>Capacity</u>

Jumbo Spanner Set 10 Piece Imperial

B10PJSI /= BORUM

10 Imperial Sizes: 1 5/16", 1 3/8", 1 7/16", 1 1/2", 1 5/8", 1 11/16". 1 3/4". 1 13/16". 1 7/8" 2" Wallet rolled out: 830 x 690 x 30mm Wallet rolled up: 150 x 690 x 130mm Weight: 14kg

Excludes GS

INDUSTRIAL OUALIT

Wallet rolled up: 150 x 690 x 130mm

Inc. GST \$284.90





Jumbo Spanner Set

B10PJSM = BORUM

34mm, 36mm, 38mm, 41mm, 42mm, 44mm, 45mm, 46mm, 48mm & 50mm Wallet rolled out: 830 x 690 x 30mm

10 Piece Metric



| Code | 7000T | 7001T | 7002T | 7003T | 7004T | 7005T |
|-------------------------|-------------------|----------|-----------|------------|-----------|-----------|
| Vice type | Fixed | Fixed | Fixed | Swivel | Swivel | Swivel |
| Jaw Width | 125mm | 150mm | 200mm | 125mm | 150mm | 200mm |
| Jaw Opening 130mm 150mm | | 170mm | 140mm | 40mm 170mm | | |
| Throat Depth | 69mm | 76mm | 88mm | 76mm | 76mm 86mm | |
| Anvil Size | ze 85x90mm 100x10 | | 105x105mm | 106x106mm | 127x127mm | 147x147mm |
| Excl. GST \$149 | | \$199 | \$269 | \$218 | \$319 | \$439 |
| Incl. GST | \$163.90 | \$218.90 | \$295.90 | \$239.80 | \$350.90 | \$482.90 |

Jaws rotate

360°



7009T TRADEQUIP Jaw width: 150mm Jaw opening: 140mm Throat depth: 80mm Anvil size: 80x65mm

FEATURES

Body of rugged quality malleable cast iron. Forge hardened steel serrated jaws.
Precision machined steel screw and handle

Reinforced mounting lugs.
Versatile 360° Swivel base locks in place.
Jaws rotate 360° and lock for unlimited

Holds flat stock as well as round stock with

the built-in pipe jaws. Large hardened anvil work surface Inc. GST \$427.90 360° Swivel Base MADE FOR THE TRADE Reinforced mounting

Bench Offset Vice 150MM

7007T TRADEQUIP

Jaw width: 150mm Jaw opening: 140mm Throat depth: 103mm Weight: 21kg

Excludes GS1 Inc. GST \$426.80



Commercial Bench Vice Swivel with Anvil 150MM

BRV150 /= BORUM

Jaw width: 150mm Jaw opening: 150mm Throat depth: 105mm Anvil size: 90x105mm

Excludes GS



Commercial Bench Vice Swivel with Anvil 200MM

BRV200 /= BORUM

Jaw width: 200mm Jaw opening: 200mm Throat depth: 115mm Anvil size: 100x113mm





NOT INTENDED FOR SPRING COMPRESSING & BEARING, SLEEVE OR BUSHING PRESSING

lugs

ALL BORUM DRILL PRESSES FEATURE

Flexible worklight. Engineering style work table. Oversize micro-switch activated safety guard.

Low-noise belt drive with cast iron balanced pulleys.

Safety ON-OFF switch fitted with a dust cover and positive action push buttons plus a large (Red) self locking "Emergency Stop" hinge cover. Precision spindle bearing for long life & high accuracy

Table control via hand crank and gear rack with high load capacity. Long quill stroke, easy to adjust depth stop at the capstan handle.

Thick-walled, precision-ground column for extra rigidity. Powerful long-life commercial drive motor provides high reliability.

Ground set-up areas on table and base plate.

Solid rotating work table with diagonal clamping slots.

The same reliable 'Heavy Duty Industrial Quality Drill Presses'

since we started manufacturing them in 1984... but with the benefit of some 21st Century features

3/4HP Pedestal Drill **Press 16 Speed**

CH16NFT /= BORUM

Motor: 240Volt 3/4HP Number of speeds: 16 Spindle taper: MT2

Spindle speeds: 162-3000rpm Max. drilling capacity: 16mm Max. spindle stroke: 78mm

Max. distance spindle to table: 7810mm Max. distance spindle to base: 1219mm

Chuck: 16mm Swing: 535

Size of table: 473x410mm Diameter of column: 73mm Size of base: 450x265mm Overall height: 1588mm







INDUSTRIAL









1HP Pedestal Drill **Press 16 Speed**

CH18FT /= BORUM

Motor: 240Volt 1HP Number of speeds: 16 Spindle taper: MT2

Spindle speeds: 200-3160rpm Max. drilling capacity: 20mm Max. spindle stroke: 82mm

Max. distance spindle to table: 775mm Max. distance spindle to base: 1270mm

Chuck: 16mm Swing: 430mm

Table diameter: 350mm Diameter of column: 80mm Size of base: 460x270mm

Overall height: 1625mm





Inc. GST \$1681.90



2HP Pedestal Drill Press 12 Speed

CH30T Z BORUM

Motor: 240Volt 2HP Number of speeds: 12 Spindle taper: MT4

Spindle speeds: 210-2160rpm Max. drilling capacity: 32mm

Max. spindle stroke: 122mm Max. distance spindle to table: 720mm Max. distance spindle to base: 1230mm

Chuck: 16mm Swing: 535

Size of table: 473x410mm Diameter of column: 92mm Size of base: 572x495mm

Overall height: 1780mm







Scan code to go to our Top Tips guides and learn how to extend the life of your **TQB Brands** equipment

Visit our webpage www.tqbbrands.com.au for instructional & pre-start videos.



Overall

MORE THAN JUST A PRESS!

Workshop Mate Workstation featuring a 30,000KG Shop Press & Spring Compressor



Safe working capacity: 30,000kg Working range: 224mm-819mm Piston ram stroke main ram:

140mm (Standard load cap fitted)

Bed height settings: 85mm increments-8 settings

Bed width: 466mm Bed gap: 200mm

Spring compressor: Piston ram stroke: 295mm

Operating air pressure: 90-125psi

Overall dimensions: 1820H x 1170W x 820Dmm

Weight: 400kg



MADE FOR THE

FEATURES

AIR/HYDRAULIC OPERATED 30,000KG PRESS SPRING COMPRESSOR. FILTER CRUSHING ACCESSORY DOZENS OF UNIQUE TOOLING OPTIONS ON-BOARD TOOLING STORAGE STAND WINCH OPERATION TO LOWER AND RAISE BENCH

BENEFITS

Press almost any bearing or bush with PRECISION and ACCURACY in minutes, saving valuable workshop time.

Smooth AIR/HYDRAULIC foot pedal operation for handsfree accuracy & control.

Hands free Spring Compression.

Even the most difficult pressing tasks become SAFE & EASY.

Complete with COMPREHENSIVE HIGH QUALITY Interlocking Tool, Die and Spacer Kit to ensure SAFE WORK PRACTICES.

Complete on machine storage - minimises time spent searching for the required tools & spacers for each job!

Tasks like SUSPENSION BUSHES once seen as too hard become a breeze.

A comprehensive variety of spring adaptors, suitable to almost any type or model of spring SAFE & EASY to compress in minutes.

Decrease labour time & increase productivity and efficiencies.

INCREASE WORKPLACE SAFETY.

Undertake jobs that are currently too difficult.

Workshop Mate 18 Piece Sleeve Kit

18 Piece Sleeve Set includes: 28x20x80mm; 33x25x80mm; 38x30x80mm; 43x35x80mm; 48x40x80mm; 53x45x80mm; 58x50x80mm; 63x55x80mm; 68x60x80mm; 73x65x80mm; 78x70x80mm; 83x75x80mm; 88x80x80mm; 93x85x80mm; 98x90x80mm; 103x95x80mm; 108x100x80mm; 1 13x105x80mm

18 sleeves constructed from heat-treated forged carbon steel.

Sturdy metal carry case.

Designed and engineered to work as an added accessory to all current Workshop Mate Workstations.

WSMP50

ACCESSORY







0









Visit our webpage www.tgbbrands.com.au for more specifications and images



BONUS OFFER

WSMP50 WITH **WSM4 ORDERED ALUED AT**

GST

PLUS

Excludes GS1 Inc. GST \$9348.90

EG TRADEOUIP

PRODUCT CODE WSM4

*FREIGHT **RATES WILL**

APPLY





Scan code for online product . demonstration

*NOTE: ADDITIONAL TOOLING MAY BE **REQUIRED FOR SOME APPLICATIONS**

TRANSFORM THE WORKSHOP

Workshop Press 20,000KG

1061T TRADEQUIP

Safe working capacity: 20,000kg Working range: 60-773mm Overall height: 1503mm Overall width: 705mm Overall depth: 660mm

BARRIER AWAILABLE SEPARATELY

Bed gap: 103mm Bed inside: 285 x 103mm Press head diameter: 40mm Press head length: 68mm Jacking handle: 694mm Piston ram stroke: 160mm Weight: 82kg

Bed width: 504mm



FEATURES

High-grade Channel Steel Hydraulics are powered with a high

quality oil.
Integrated overload protection valve keeps from overloading the system. Lead-free paint finish is oil, grease and dirt-resistant for easy cleanup and to help prevent rust.



SAFETY

BARRIER AVAILABLE

SEPARATELY

Workshop Press 30,000KG

1062T TRADEQUIP

Safe working capacity: 30,000kg Working range: 45-705mm Overall height: 1605mm Overall width: 745mm BARRIER Overall depth: 660mm AVAILABLE Bed width: 480mm SEPARATELY Bed gap: 124mm Bed inside: 254 x 124mm Press head diameter: 50mm

Press head length: 68mm Jacking handle: 694mm Piston ram stroke: 163mm Weight: 113kg



FFATURES

High-grade Channel Steel Hydraulics are powered with a high

Integrated overload protection valve keeps from overloading the system. Lead-free paint finish is oil, grease and dirt-resistant for easy cleanup and to help prevent rust.



Hydraulic Workshop Press 20,000KG

1063T TRADEQUIP

Safe working capacity: 20,000kg Working range: 43-882mm Overall height: 1795mm Overall width: 780mm Overall depth: 690mm Bed width: 505mm Bed gap: 105mm Bed Inside: 358 x 105mm Press head cap diam: 45mm Press head cap length: 17mm Ram lateral adjustment: 180mm Piston ram stroke: 185mm Weight: 90kg

FEATURES

High-grade Channel Steel. 100mm pressure gauge. High quality large diameter hydraulic steel cylinder unit.

Hydraulics are powered with a high quality oil.

Integrated overload protection valve keeps from overloading the system. Lead-free paint finish is oil, grease and dirt-resistant for easy cleanup and to help prevent rust.

Lateral Ram Adjustment





TA TRADEQUIP

Hydraulic Workshop Press 30,000KG

1064T TRADEQUIP

Safe working capacity: 30,000kg Working range: 50-1030mm Overall height: 1950mm Overall width: 830mm Overall depth: 660mm Bed width: 455mm Bed gap: 154mm Bed inside: 230 x 154mm Press head diameter: 56mm Load cap length: 17mm Jacking Handle: 639mm Ram lateral adjustment: 70mm Piston ram stroke: 170mm Weight: 138kg

FEATURES
High-grade Channel Steel.
100mm pressure gauge.
High quality large diameter hydraulic steel cylinder unit. Hydraulics are powered with a high quality oil.
Integrated overload protection valve

keeps from overloading the system. Lead-free paint finish is oil, grease and dirt-resistant for easy cleanup and to help prevent rust.


Lateral Ram Adjustment





Hydraulic Workshop Press 45,000KG WIDE

2036T TRADEQUIP



Bed inside: 195mm Bed width: 826mm Piston ram stroke: 190mm Ram diameter: 90mm 1707H x 1420W x 826Dmm Bed height settings: 6



Weight: 296kg

*MODEL RUNDUT

High-grade steel frame. 100mm pressure gauge. Bed winch for easy raise and lower adjustment. Lead-free paint finish is oil, grease and dirt-resistant Hand winch for fast adjustment.









HEIGH

SAFETY

BARRIER

SEPARATELY

TO TRADEQUIP

MADE FOR THE

Piston ram stroke: 190mm

Bed inside: 210mm

Bed width: 713mm

Hydraulic Workshop Press 50,000KG 2048T TRADEQUIP

Safe working capacity: 50,000kg Ram diameter: 95mm Working range: 137-837mm Op. air pressure: 110-125 psi Bed outside: 356mm 1700H x 1290W x 745Dmm

Bed height settings: 6 Weight: 271kg Bed internal: 390 x 200mm

GST \$2913.90

BARRIER SEPARATELY



FEATURES

FEATURES

Heavy-duty high-grade steel frame. Hand operated air trigger ram travel control. 100mm pressure gauge. Polished pneumatic aluminium air motor. Bed winch for easy raise and lower adjustment. Lead-free paint finish helps prevent rust& is oil grease and dirt-resistant. High quality large diameter hydraulic unit. Hand winch for fast height adjustments.



Air/Hydraulic Workshop Press 45,000KG WIDE

2038T TRADEQUIP

Safe working capacity: 45,000kg Working range: 159-859mm Bed outside: 359mm Bed inside: 195mm Bed width: 826mm Piston ram stroke: 190mm Ram diameter: 90mm Op. air pressure: 110-125 psi 1707H x 1420W x 800Dmm Bed height settings: 6 Weight: 301kg

AIR OPERATED

FEATURES

High-grade steel frame. 2 speed pump. 100mm pressure gauge.
Bed winch for easy raise and lower adjustment.
Paint is oil, grease and dirtresistant for easy cleanup. High quality large diameter hydraulic steel cylinder unit. Piston-ram is treated, polished. Includes hand winch. Integrated overload protection valve prevents overloading.

Extra-long handle included for easy pumping force.

Double spring ram return for

MADE FOR THE

fast ram retraction



Workshop Press Adaptor Kit

BPAK /= BORUM

Includes 8 different sized pins (mandrels) ranging from 2,000kg to 20,000kg capacity, a pin holder, a storage shelf along with a mounting kit, and a pin plate with the weight capacity shown for each pin. This very handy set of eight steel mandrels,

adaptor and press plate expands the uses of your workshop press for a wider range of applications involving different sized work pieces.



Inc. GST \$196.90

Mandrel Length x Diameter 50mm x 10mm

60mm x 12mm 60mm x 16mm

85mm x 18mm 85mm x 20mm 85mm x 22mm

15mm x 25mm 110mm x 30mm



**UNLESS STATED OTHERWISE ALL TOB BRANDS PRODUCTS. EXCLUDING CONSUMABLES, COME WITH A 12 MONTH COMMERCIAL USE WARRANTY AGAINST MANUFACTURING DEFECTS. THE BONUS 12 MONTH WARRANTY OFFERED EXCLUSIVELY IN THIS PROMOTIONAL PERIOD APPLIES ONLY TO THE HYDRAULIC RAM AND HYDRAULIC PUMP FOR 'BONUS' MARKED PRODUCTS. THE ADDITIONAL 12 MONTHS DOES NOT INCLUDE INSTALLATION/REMOVAL LABOUR OR FREIGHT FOR THE COMPONENT

Air/Hydraulic Workshop Press 30,000KG HEIGHT

PROSHPR30TA

Safe working capacity: 30,000kg Working range: 25-850mm Screw adjustment: 75mm Bed outside: 164mm Bed inside: 148mm Bed width: 600mm Ram diameter: 58mm

SAFETY BARRIER SEPARATELY

Bed height settings: 6 1800H x 770W x 505Dmm Weight: 163kg

LATEST APPLIED TECHNOLOGIES

30,000kg



- ✓ Mandrel Kit Included
- ✓ Long Pump Handle
- **Premium Bed Blocks**
- Winch Adjustable Bed
- Premium Hydraulic System
- ✓ Premium Paint Finish
- ✓ Precision Lateral Ram Adjustment
- **Premium Grade Steel Construction**
- ✓ Designed for maximum strength, reliability and durability

Foot Pedal Air/Hydraulic Operation



OPRO



Air/Hydraulic **Workshop Press** 50,000KG

PROSHPR50TA

Safe working capacity: 50,000kg Working range: 80-780mm Screw adjustment: 75mm Bed inside: 200mm Bed outside: 220mm BARRIER AVAILABLE Bed width: 750mm Ram diameter: 68mm

Bed height settings: 6 1900H x 930W x 535Dmm Weight: 243kg











Electric Workshop Press 30,000KG

EPROP30TE

Safe working capacity: 30,000kg Working range: 25-850mm Screw adjustment: 75mm Bed outside: 164mm Bed inside: 148mm Bed width: 600mm Ram diameter: 58mm Bed height settings: 6 1800H x 1080W x 505Dmm Weight: 163kg

LATEST APPLIED TECHNOLOGIES PRO

30,000kg Capacity

FEATURES

Heavy-duty high-grade steel H-frame Integrated overload protection valve. Foot & Hand operated pump. 100mm pressure gauge.
STEEL SAFETY MESH BARRIER Lead free paint finish is oil, grease and dirt-resistant for easy cleanup. Piston-ram is fitted with backup ring, preventing bypass oil drift. High quality hydraulic oil offers better corrosion resistance and flexibility. Pair of bed plates included.

Inc. GST \$3738.90



Electric Workshop Press 50,000KG

EPROP50TE

Safe working capacity: 50,000kg Working range: 80-780mm Screw adjustment: 75mm Bed inside: 200mm Bed outside: 220mm Bed width: 750mm Ram diameter: 68mm Bed height settings: 6 1900H x 1240W x 535Dmm Weight: 243kg

LATEST APPLIED TECHNOLOGIES

FEATURES

Heavy-duty high-grade steel H-frame. Integrated overload protection valve.
Foot & Hand operated pump.

100mm pressure gauge STEEL SAFETY MESH BARRIER

Lead free paint finish is oil, grease and dirt-resistant for easy cleanup.
Piston-ram is fitted with backup

ring, preventing bypass oil drift. High quality hydraulic oil offers better corrosion resistance and flexibility.
Pair of bed plates included.

Inc. GST \$5058.90



Air/Hydraulic Workshop Press 75,000KG

BSP75TA /= BORUM

Safe working capacity: 75,000kg Working range: 170-884mm Overall height: 1925mm Overall width: 1340mm Overall depth: 800mm Bed width: 800mm Bed surface depth: 279mm

Piston ram stroke: 250mm Ram diameter: 125mm Width between side posts: 217mm

Bed height settings: 8 Operating air pressure: 110-125psi

Air inlet: 1/4"NPT Weight: 451kg

Power to safely remove & install bearings, gears, U-joints, bushings, ball joints and pulleys with precision and versatility!



8 HEIGHT

Air/Hydraulic Workshop Press 100,000KG BSP100TA /= BORUM

Safe working capacity: 100,000kg Working range: 113-813mm Overall height: 1848mm Overall width: 1250mm Overall depth: 990mm Bed width: 787mm Bed surface depth: 342mm

Piston ram stroke: 300mm Ram diameter: 140mm Width between side posts: 268mm Bed height settings: 6

Operating air pressure: 110-125psi Air inlet: 1/4"NPT Weight: 652kg

Ideal for straightening, stamping, bending and pressing any component that is difficult to handle.



6 HEIGHT



- Heavy-duty H-frame constructed of high-grade steel and built to exacting standards for quality and durability.

 Foot operated air trigger ram travel control. 100mm pressure gauge. Extra tall working range for versatility. Pair of bed plates included
- Table winch system lowers or raises the bed. Integrated overload protection valve keeps from overloading the system.
- High quality large diameter hydraulic steel cylinder unit results in lower oil pressure needed to raise the load, helping to reduce wear and extend service life.
- Piston-ram is treated and polished and fitted with backup ring, preventing load from falling slowly or bypassing oil drift.

 Hydraulics are powered with a high quality oil, which offers better corrosion resistance & high/low temperature flexibility, allowing the unit to operate at temperatures.
- Léad-free paint finish is applied after a thórough chemical wash to ensure a long-lasting finish to help prevent rust & is oil, grease, & dirt-resistant for easy clean up.

****UNLESS STATED OTHERWISE, ALL TOB BRANDS PRODUCTS, EXCLUDING CONSUMABLES, COME WITH A 12 MONTH COMMERCIAL USE WARRANTY AGAINST MANUFACTURING DEFECTS. THE BONUS 12 MONTH WARRANTY OFFERED EXCLUSIVELY IN THIS PROMOTIONAL PERIOD APPLIES ONLY TO THE HYDRAULIC RAM AND HYDRAULIC PUMP FOR BONUS MARKED PRODUCTS. THE ADDITIONAL 12 MONTHS DOES NOT INCLUDE INSTALLATION/REMOVAL LABOUR OR FREIGHT FOR THE COMPONENT.

Polycarbonate TQB Shop Press Safety Barrier

TRADEQUIP

SUIT TQB BRANDS
PRESSES ONLY



Multiple Height Settings

SGUARD-1

PRESS GUARD POLY CARBONATE SUIT 1061/1062/10637



PRESS GUARD POLY CARBONATE SUIT BSP75TA \$259 Inc. GST \$273.90

SGUARD-2
PRESS GUARD
POLY CARBONATE

SUIT 1064T



SGUARD-4
PRESS GUARD
POLY CARBONATE
SUIT 2038T/
2036T/BSP100TA

Excludes GST **\$315** Inc. GST \$346.50

* * * * AVAILABLE IN FOUR DIFFERENT SIZES * * * *



Master Press & Pull Set 28 Piece

9028T TRADEQUIP

4 x Step plates: 74, 76, 78, 80mm 4 x Pulling spindles with thrust bearings 20 x Press sleeves: 44 x 43, 46 x 36; 48 x 38; 50 x 40; 52 x 42; 54 x 44; 56 x 46; 58 x 48; 60 x 50; 62 x 52; 64 x 54; 66 x 56; 68 x 58; 70 x 60; 72 x 62; 74 x 64; 76 x 66; 78 x 68; 80 x 70; 82 x 72mm Heat-treated forged carbon steel Sturdy Blow Mould Case



MADE FOR THE TRADE



FWD Wheel Bearing Kit 23 Piece

9029T TRADEQUIP

Hub screw length: 207mm Hub screw drive: 32; 38mm Sleeve external: 76.5 x 65; 86 x 77; 91 x 81.5; 102 x 92mm Drift sizes: 50; 55; 59; 63; 66.5; 70; 71.5; 73; 73.5; 75, 77.5; 81.4; 83.3; 86; 88.4; 102mm Heat-treated forged carbon steel Sturdy Blow Mould Case



Excludes GST **\$229** Inc. GST \$251.90



Universal Press & Pull Sleeve Kit 26 Piece

9024T TRADEQUIP

4 Beams 3 ½" Sleeves 20 Sleeves 11pieces (GOLD) 9 pieces (SILVER)



For removal and installation of bushes, bearings and seals, races, sprockets and pulleys on cars, trucks, off-road construction equipment and machinery



Hydraulic Gear Puller 23 Piece

9023T TRADEQUIP

Capacity: 10,000kg
Bearing Separator: 20-105mm
Twin/triple head, beam and legs to
build: 100, 150 and 200mm
Two and three leg hydraulic pullers
with separator capacity: 75-105mm
Size: 355L x 195W x 150Hmm

Pulls bearings, timing gears, steering wheels and pulleys on most cars and light trucks





Universal Press Support Block 30,000KG

9025T TRADEQUIP

Base block: 250 x 200 x 40mm Height adaptor block: 200x70x40mm

Made from Billet aluminium



Excludes GST **\$355**Inc. GST \$390.50

For use with a hydraulic shop press for workpieces with a complicated shape to allow bearings to be pressed in or out accurately.











Motorcycle Lifter 360KG

MADE FOR THE

2102T TRADEQUIP

Safe working capacity: 360kg Height: 205 - 780mm Platform: 490W x 1345Lmm

Weight: 95kg



Motorcycle Scissor Lift 500KG

2104T TRADEQUIP

Safe working capacity: 500kg Height: 95 - 420mm

Platform dimensions: 450x150mm

Weiaht: 13.8ka

FEATURES

Designed to deliver the ideal lift for use with motorcycles, ATV's, tractors, personal watercraft, and snowmobiles

Lifts back wheel off lift table for tyre/wheel

Powder coated structural heavy duty steel construction.

Rotate lead screw to adjust & raise the lift. Bolt down lugs to prevent unwanted movement.







Motorcycle Lifter 450KG 2101T TRADEQUIP

Safe working capacity: 450kg Height: 175 - 750mm

Platform: 680W x 2200Lmm Weight: 120kg







FEATURES

Ideal lift for use with motorcycles, ATV's tractors, personal watercraft & snowmobiles. Locking bar for safety.

Powder coated structural heavy duty steel Extra Long Full width loading ramp.

Step-less rate of lowering irrespective of load.
Oil trap plate for easy drainage.
2 foot pedals for raising & lowering - for easy

hands free operation.
Fitted with 2 position platform locking device

to prevent accidental lowering.

Quality wheels and swivel castors making it easier to position and move around Lockdown bolts to prevent unwanted

movement during use. Does not include tie down straps.





Motorcycle Lifter Air Actuated 680KG

2103T TRADEQUIP

Safe working capacity: 680kg Height: 185 - 825mm

Platform dimensions: 710 x 2000mm Required air pressure: 0.75-0.85Mpa

Weight: 169kg







FEATURES

Designed to deliver the ideal lift for use with motorcycles, ATV's, tractors, personal watercraft, and snowmobiles. Locking bar for safety. Extra long full width loading ramp.

Powdercoated structural heavy duty steel. Stepless rate of lowering irrespective of the load

Oil trap plate for easy drainage.

Lockdown bolts. 2 foot pedals for raising & lowering - for easy

hands free operation. Fitted with 2 position platform locking device





Parts Washer 90 Litre

1003T TRADEQUIP

Pump power: 240V/50Hz/0.5A Pump output: 2.7-3.3 Litres per min. Tank: 758L x 527W x 275Hmm Minimum fluid capacity: 18 Litres Maximum fluid capacity: 45 Litres Size: 780L x 540W x 908Hmm



FEATURES

Sturdy metal construction and quality enamelled gloss finish.

Enclosed "High Volume" electric pump & fully screened pump housing.

Built-in replaceable pump inlet filter.

Chromed flexible metal fluid delivery pipe Large removable parts cleaning shelf for inspection and drying.

Immersion soaking when parts cleaning shelf removed.

Non welded one-piece tank with Quick Close fire safe lid mechanism.

Suitable for use with aqueous water based cleaning fluids.

Replacement parts available



Parts Washer 180 Litre

1004T TRADEQUIP

Pump power: 240V/50Hz/0.5A Pump output: 2.7-3.3 Litres per min. Tank:1135L x 545W x 320Hmm Min. fluid capacity: 33 Litres Max. fluid capacity: 90 Litres Size: 1150L x 560W x 1430Hmm



FEATURES

Sturdy metal construction and quality enamelled gloss finish. Enclosed "High Volume" electric pump & fully screened pump housing.

Built-in replaceable pump inlet filter. Chromed flexible metal fluid delivery pipe

Large removable parts cleaning shelf for inspection and drying. Immersion soaking when parts cleaning shelf removed.

Non welded one-piece tank with Quick Close fire safe lid mechanism. Suitable for use with aqueous water based cleaning fluids.

Replacement parts available



Parts Washer Brush & Hose



Long life 70mm synthetic bristles Polypropylene handle Stepped hose fitting suitable for connecting to 13mm and 16mm spouts Suits TradeQuip parts washers 1003T, 1004T & 1050

MADE FOR THE

Stiff bristles are ideal for cleaning automotive and machined parts



Parts Cleaning Concentrate 10 & 20 Litre MADE FOR THE



ENVIRO FRIENDLY

ODEGRADABLE

NON-TOXIC

FORMULATED FOR USE IN ALL TRADEQUIP PARTS CLEANERS

| Code | 5083T | 5082T |
|-----------------|-----------|------------|
| Bottle contents | 10 Litres | 20 Litres |
| Creates | 50 Litres | 100 Litres |
| Exi. GST | \$89 | \$145 |
| Incl. GST | \$97.90 | \$159.50 |



Replacement Parts Washer Pump

1005 TRADEQUIP

Power: 230V 50Hz 26W 0.6Amp Cable length: 305mm Head max: 1.8m

Flowrate: 3.15 litres per minute Outlet thread: 1/2" NPT Female 100L x 85H x 65W mm

WARNING: ONLY SUITABLE FOR USE WITH WATER BASED SOLUTIONS



Inc. GST \$93.50

MADE FOR THE

Sturdy poly/plastic body. Stainless steel shaft. Suits parts washers with chromed flexible metal fluid delivery pipes.

Snap off inlet grill for easy cleaning.
Suitable for use with aqueous water based cleaning fluids.
Works with TradeQuip parts washers (Code/s 1003T, 1004T and 1050, sold separately)







DESIGNED FOR AUTOMOTIVE & INDUSTRIAL APPLICATION

DON'T BE FOOLED BY CHEAPER IMITATIONS THAT ARE DESIGNED FOR DENTISTRY, MODEL BUILDING, OPTOMETRY & LIGHTER DUTIES

6 Litres TATRADEQUIP

Capacity: 6 Litres Ultrasonic power: 150W Ultrasonic frequency: 40KHz Heating power: 300W Heating temperature: 20-80 C

1036T

Timer range: 0-30 Minutes Tank material: 304 Grade 2mm thick Tank size: 300L x 155W x 150Hmm Size: 330L x 180W x 310Hmm

MADE FOR THE TRADE

13 Litres TATRADEQUIP

Capacity: 13 Litres Ultrasonic power: 300W Ultrasonic frequency: 40KHz Heating power: 400W Heating temperature: 20-80 C

1037T

Timer range: 0-30 Minutes Tank material: 304 Grade 2mm thick Tank size: 330L x 300W x 150Hmm Size: 360L x 330W x 310Hmm



* 30 Minute Timer

* Adjustable Temp. Control 304 Grade tainless teel Tank



-Inc. GST \$1758.90 79 TRADEQUIP HAVE FOR THE TRADE

27 Litres TATRADEQUIP

Capacity: 27 Litres Ultrasonic power: 500W Ultrasonic frequency: 40KHz Heating power: 500W Heating temperature: 20-80 C

Timer range: 0-30 Minutes Tank material: 304 Grade 2mm thick Tank size: 500L x 300W x 200Hmm Size: 550L x 330W x 360Hmm

1038T

CLEANING FLUID OPTION AVAILABLE SEE PAGE 26

36 Litres Tatradequip

Capacity: 36 Litres Ultrasonic power: 600W (adjustable) Ultrasonic frequency: 28/40KHz Heating power: 800W Heating temperature: 20-80 C

Timer range: 0-30 Minutes Tank material: 304 Grade 2mm thick Tank size: 500L x 290W x 250Hmm Size: 570L x 360W x 450Hmm

1039T



LARGER SIZES AVAILABLE FOR SPECIAL ORDER. PLEASE ENQUIRE WITH YOUR PREFERRED DISTRIBUTOR.

Hydraulic Ram Kit 2011T TO TRADEQUIP

Blow mould carry case: 530 x 500 x 110mm Weight: 24kg



udes GST



INDUSTRIA

GUALITY

Inc. GST \$1582.90

Set Includes: 4 x Hooks - 2 Large and 2 Small 2,000kg Mini Ram - Compressed 139mm > Stroke 76mm 4,000kg Mini Ram - Compressed 42mm > Stroke 16mm 10,000kg Mini Ram - Compressed 118mm > Stroke 60mm 4,000kg Porta Power Ram - Compressed 276mm > Stroke 132mm 10,000kg Porta Power Ram - Compressed 350mm > Stroke 150mm 2,000kg Pull Back Ram - Extended 537mm > Stroke 128mm 5,000kg Pull Back Ram - Extended 613mm > Stroke 130mm

Porta Power Kit BPP20T = BORUM

Safe working capacity: 20,000kg Extension tubes: 125, 255, 510, 700mm 3 each, 70mm connective tube & 60mm joint connector tube Base, Ram toe, Plunger toe Wedge toe, V-base, Wrench Retracted ram length: 285mm Ram stroke: 125mm

Hydraulic hose length: 1470mm Weight: 62kg

Constructed of high-grade steel and built to exacting standards for quality and durability. Lead-free paint finish is oil, grease and dirtresistant for easy cleanup.
High quality hydraulic steel cylinder unit helps night quality invaluallic steet cylinder unit neighs to reduce wear and extend service life. Piston-ram is treated and polished. Hydraulics are powered with a high quality oil, which offers better corrosion resistance and high/low temperature flexibility.





Air/Hydraulic Pump

2054T TRADEQUIP

Maximum output pressure: 10,000psi Usable hydraulic fluid capacity: 2.25 Litres Operating air pressure: 90-145 psi Air consumption: 7.5CFM @ 100 psi Oil delivery with No Load: 49.5 cu.in/min Oil delivery with Load: 7.6 cu.in/min Input (Air) port thread: 1/4" -18 NPT Output (Oil) port thread: 3/8" -18 NPT

FEATURES

Durable light-weight corrosion-free aluminium. Built-in overload system prevents pump from being used beyond its safety capacity. Ergonomic hand/foot activation lever. Air/oil filters minimise contaminants in hydraulic system.
Perfect for porta power rams & bead breakers.
Compact design fits in truck storage boxes. Air exhaust muffler for quiet operation.

EH-8206F Hose to suit - \$189 ex gst \$207.90 inc gst Inc. GST \$801.90

Porta Power Kit 2010T TATRADEQUIP

Safe working capacity: 10,000kg 14 Piece Kit containing pump and hose fittings

Ram length retracted: 322mm Ram length extended: 452mm Extensions: 110,265,365,520mm Case: 905L x 385W x 175H mm Hydraulic hose length: 1500mm Hydraulic oil capacity: 650ml Adaptor diameter: 33mm Weight: 31ka



FEATURES

Spring loaded ram return system, allowing controlled retraction of the ram.

Pump may be used in horizontal & vertical position.

Constructed of high-grade steel and built to exacting standards for quality and durability.

Lead-free paint finish is oil, grease and dirt-resistant.

Pump has an automatic overload system.

Easily adapts to hoses, rams, pumps, spreaders, and other accessories using common 1/4" fittings



Inc. GST \$530.20

FEATURES

Durable steel construction

pump (sold seperately).

Clamps to wheel rim & breaks bead

simply with up to 5,000kg of force. Requires 10,000psi air/hydraulic

Combi Portable Bead Breaker 5,000KG

BTBB05 /= B O R U M

Working load limit: 5,000kg Pressure connection: 3/8"-18NPTF Rated pressure: 10,000psi Maximum rim size: 26'

Suits 1,2 & 3 pce rims (up to 26") with pry bar / bead loosening pockets

Ram stroke: 90mm

INDUSTRIAL

QUALITY

Giant Portable Bead Breaker 13,000KG

BTBB13 /= BORUM

Working load limit: 13,000kg Pressure connection: 3/8"-18NPTF Rated pressure: 10,000psi Suits 5 pce rims 635-1,295mm (25"-51")

with pry bar / bead loosening pockets Maximum rim size: 26"

Ram stroke: 105mm

FFATURES

Economical solution for earthmover wheels 25" – 51" multi-piece rims with pry bar pockets.

Hydraulically clamps on wheel. Durable steel construction.

Hydraulic power breaks beads in seconds. Requires 10,000psi air/hydraulic pump (sold seperately)

Inc. GST \$878.90









Blasting Cabinet 220 Litre Capacity

MADE FOR THE

3051 TRADEQUIP

Cabinet capacity: 220 Litre Working pressure: 60-110psi Maximum media capacity: 20kg

4 Ceramic nozzle tips: 4, 5, 6 & 7mm With gun & low voltage internal fluorescent light

Tempered glass view window: 250 x 525mm External size: 1400H x 890L x 550Wmm

Includes gun and light





Freestanding floor model. Complete with gun and low voltage internal fluorescent light. Tempered glass viewing window with

Protective shields.
Cabinet fitted and ready to be used with a workshop vac as dust collection system. Spare parts available in Australia



Tempered

Side

opening

Blasting Cabinet 420 Litre Capacity

3036T TRADEQUIP

Cabinet capacity: 420 Litre Air regulator & gauge panel 4 Ceramic nozzles: 2x5mm, 2x6mm Maximum media capacity: 70kg Maximum air pressure: 125psi Required air supply: 15-25CFM 14 gauge steel legs & 16 gauge panels Sand blasting efficiency: 100cm²/min Optimum operating pressure 60-110psi External size: 1680H x 1180W x 940Dmm



Oversized hinged top door opening Includes 240V dust extraction system



Includes blasting gun and vinvl blaster gloves

FFATURES

Perfect for surface preparation on any type where other forms of preparation are difficult.

are difficult.
Ideal for removing paint, rust, scale and oxidation.
Large viewing window gives the operator a wide viewing area.
Oversized hinged top door opening & large inside work area allows easy maneuverability.
Hinged door on hopper allows for easy abrasive changes

abrasive changes.
Fluorescent light kit and 90CFM dust collector help the operator to maintain a

good visual.

Rear-mounted dust collector.

Replaceable protective window.Footpedal-controlled siphon blast gun.





Soda/Sand Blasting Hood

3053 TRADEQUIP

Durable fabric & synthetic-leather construction Large 110mm x 55mm acrylic viewing plate Adjustable internal helmet for added comfort Reinforced side ventilation panels for increased airflow

FEATURES

Protect eyes and face from "rebounding" abrasive particles by wearing Abrasive Blasting Hood. Ideal for many abrasiveblasting applications





BLASTING MEDIA ABRASIVE

TradeQuip "Made for the Trade" Blasting Media Abrasives are designed for use in conjunction with our TradeQuip Mobile Blasting Kits and Blasting Cabinets. Abrasive blasting has been used for many years to clean and remove rust, paint and corrosion. There are many types of abrasive media available, the most common being Garnet, Steel Grit and Glass Bead. These media have an aggressive cut and can rapidly remove paint and rust. However, they can also generate significant heat, potentially resulting in warped metal and etched surfaces, and they cannot be used on fibreglass. Also, chrome, plastic, rubber, trim, and other parts must be removed from a work surface or masked-off before blasting.

Alternatively, less-aggressive media, such as Walnut Shell, will do a great job at removing paint. Walnut Shell does not generate as much heat as other media, and can be used on sheet metal and fibreglass without damaging the base material. However, Walnut Shell as with any abrasive media, will require more clean-up as it leaves particles in the car body's seams and crevices that can be difficult to completely remove.

Soda blasting media has non abrasive properties which makes it a very universal blasting media which can be applied to lighter materials such as aluminium, plastic, fibreglass, wood etc. Soda Blasting does not damage glass, rubber, chrome items if they are left on a vehicle for blasting.

GARNET 25KG MEDIUM 30/60 3020T TRADEQUIP

Garnet is a gemstone with excellent naturally abrasive properties.

This hard abrasive is fast-cutting, low-dust producing and low-consuming, excellent for removing tough coatings, paint, rust and mill scale from steel. Garnet also permits precise feathering control. A good general outdoor surface preparation abrasive.



WALNUT SHELLS 20KG 6-100 MICRON 3022T TRADEQUIP

Walnut Nut shells and other organic materials, don't cause anchor patterns, making them useful for removing dirt, grease, oil, carbon, scale, burrs and paint without changing the underlying substrate. Walnut shells can be an excellent choice for softer surfaces such as wood — they won't cause etching. Walnut shells are one of less abrasive blasting media you can use and are completely biodegrad able, making them among the most environmentally-friendly



GARNET 25KG COARSE 20/40 3023T TATRADEQUIP

Garnet is a gemstone with excellent naturally abrasive properties. This hard abrasive is fast-cutting, low-dust producing and low-consuming, excellent for removing tough coatings, paint, rust and mill scale from steel. Garnet also permits precise feathering control. A good general outdoor surface preparation abrasive.



GLASS BEAD 25KG 106-300MICRON 3025T TARADEQUIP

Glass beads are used for general cleaning, peening and cosmetic finishing of sensitive metal surfaces; removing automotive paint; brightening grout and removing fungus and calcium deposits from tile; polishing cast iron, stainless steel, aluminium, propellers and turbine blades. Glass Beads are environmentally friendly and can be used in many blast applications to provide a finish with no profile Use while working with metal, plastic or rubber materials to clean



Mobile Blasting Kit 37 Litre Capacity

3008 TRADEQUIP

Tank capacity: 37 Litre Working pressure: 60-125psi Air delivery: 400-600 Ltr p/min. @ 125psi (dependent on nozzle size) 4 ceramic nozzle tips: 2.0 2.5 3.0 3.5mm

Hose length: 2.4M 508H x 305Ø





FEATURES

Heavy duty welded steel design. High volume extra large valve.

Designed for high flow with minimal air input.

Blast gun fitted with safety trigger. Heavy-wall blast hose. Durable wheels. Safety pressure-relief valve. Safety mask, thread tape and refill funnel. Onboard pressure regulator. Easy to fill screw tank cap.





Foldable Engine Crane 1,200KG

1001T TRADEQUIP

Safe working max. capacity: 1200kg (AS1418.5 approved)

(AS 1416.5 approved)
Adjustable boom: 250kg, 500kg, 750kg & 1200kg
Max. lifting height @ 1200kg: 620mm
Max. lifting height @ 250kg: 1160mm
Jib length fully retracted @ 1200kg: 1040mm
Jib length fully extended @ 250kg: 1580mm Leg height: 190mm

Ideal for automotive & light engineering. Adjustable boom in four positions. Outrigger legs easily fold up for storage. Six swivel castor wheels.

High-grade steel and built to exacting standards for quality and durability.

Short lifting chain & hook with safety latch. Lead-free paint is oil, grease and dirt-resistant for easy cleanup.



Engine Crane Load Leveller 1030 TRADEQUIP

Safe working capacity: 680kg Chain length: 300mm Chain anchor positions: 3 Engine mount positions: 4 Weight: 6kg

Excludes GST Inc. GST \$107.80



Engine Support Bar 1019T TRADEQUIP

Safe working capacity: 500kg Extension: 1020 - 1600mm Weight: 15kg

Adjusts to fit across most car bonnets Supports engines or transmissions. der coat finish.

Adjustment screw for load leveling. Supplied with short length of chain



TRADEQUIP 500kg tension Arms

Excludes GS1 Inc. GST \$195.80

Ram to Suit TradeQuip 1001T Engine Crane

2008 TRADEQUIP

Safe working capacity: 8,000kg Length: 630-1135mm

Ram pin hole: 16mm dia. 35mm Outside ram Ram diameter: 80mm

Clevis base pin hole: 16mm dia Clevis base: 25mm inside - 45mm outside

Base width: 129mm Weight: 10.5kg

Excludes GS1

Inc. GST \$189.20

Engine Support Bar

1021T TRADEQUIP the trusted brand in equipment

Safe working capacity: 500kg Extension: 1020 - 1630mm Weight: 23kg



FEATURES

Cross bar feature for improved stability and more flexibility.

Dual hook assemblies for balanced support of engines & transmissions High gloss enamel finish. Adjustment screw for leveling.

Inc. GST \$280.50



Engine Support Bar

1020T TRADEQUIP

Safe working capacity: 500kg Extension: 1020- 1430mm Weight: 19kg diustable

FEATURES

Dual hook assemblies for balanced support. Adjustable to fit across most car bonnets. Supports engines or transmissions Rubber cushioned support legs. High gloss enamel finish. Adjustment screw for load leveling.
Supplied with a short length of chain.







CRANES AND SUPPORTS



Engine Crane 3,000KG

1193 TRADEQUIP

Safe working capacity: 3000kg
Adjustable boom: 1000kg, 1500kg, 2000kg & 3000kg
Maximum lifting height @ 3000kg: 1745mm
Maximum lifting height @ 1000kg: 2088mm
Jib length fully retracted @ 3000kg: 1100mm
Jib length fully extended @ 1000kg: 1730mm

FEATURES

This heavy duty TradeQuip "Made for the Tradeⁿ engine crane has a long stroke lifting ram, a single action pump with a maximum load capacity of 3,000kg.

Very simple to use manual hydraulic operation. The jib extends to the desired lifting capacity of 1000kg, 2000kg or 3000kg secured by a single locking pin.

Mounted on heavy duty castor wheels for excellent manoeuvrability around the workshop.





1894T TRADEQUIP

Safe Working Capacity: 4/5/6/V6 cylinder less than 4ltr Rated capacity: 500kg 360° rotating head 1190L x 850W x 1230H mm Weight: 54kg

Inc. GST \$907.50

WORM GEAR HEAD DRIVE STURDY REINFORCED **NECK**

rotating head

IMPORTANT:

ENGINE DIMENSIONS MUST BE WITHIN LEGS OF ENGINE STAND



Removable legs

Engine Stand 1891T TRADEQUIP

Safe working capacity: 4 cylinder & V6/V8 less than 5ltr Rated capacity: 680kg 360° rotating head Centre height: 895mm 870L x 800W x 900H mm Weight: 39kg



Inc. GST \$303.60



360°

rotating



Rated capacity: 450kg 360° rotating head Centre height: 780mm 700L x 750W x 860H mm Weight: 21kg

EASY SETUP & DISASSEMBLY

rotating head

IMPORTANT:

ENGINE DIMENSIONS MUST BE WITHIN LEGS OF ENGINE STAND

Excludes GST

Inc. GST \$379.50

MADE FOR THE

Engine Stand

Cylinder less than 6.2ltr

Centre height: 800mm 1110L x 530W x 900H mm

Rated capacity: 900kg

360° rotating head

Weight: 45kg

1192T TRADEQUIP

Safe working capacity: 4/5/6/V6/V8

FOLDING LEGS STURDY REINFORCED **NECK AND** STABLE WIDE BASE

TQES450 TRADEQUIP

Safe working capacity: 4cylinder engine only

SPACE SAVING COMPACT DESIGN





Steel Workbench

1014T TRADEQUIP

Safe working capacity: 90kg Work surface: 1510x700mm Raised edge height: 50mm 1520L x 710W x 830Hmm Weight: 48kg

Sturdy steel construction High gloss enamel paint finish Raised protective edge to work surface Adjustable feet for levelling on uneven floors. Quick and easy to assemble.

Easily wipe dirt and grime from surface with a soft cloth.

1520mm

50mm high raised

3 Drawer Steel Workbench

1012T TRADEQUIP

Safe working capacity: 300kg Heavy duty steel construction High gloss enamel paint finish Includes bottom shelf & 3 locking drawers Each drawer holds up to 50kg 2000L x 860H x 640Wmm

Manufactured from high quality, heavy-duty steel and features a large surface for more work space and an extended lip around the surface of the table.

The tough high gloss enamel paint finish is designed to provide years of protection against normal wear and tear.

2000mm





Mobile Workbench

6047 TRADEQUIP
the trusted brand in equipment

Safe working capacity: 250kg Bench top capacity: 150kg Bench top: 1200L x 640Wmm 1200L x 640W x 875H mm Shelf: 1110L x 460Wmm Shelf capacity: 100kg Weight: 56.5kg

MADE FOR THE 1200mm

Inc. GST \$812.90

Mobile Bench

1073T TRADEQUIP

Safe working capacity: 300kg Work surface: 1100 x 700mm 1100L x 700W x 830H mm Weight: 60kg

FEATURES

Sturdy steel construction. High gloss enamel finish. Heavy-duty handle Quality castors - two fixed & two locking swivel.

1100mm

FEATURES

Heavy duty rolled edge steel construction. Convenient removable drain bowl. 13mm benchtop rim to contain leaking fluids when working on engines and transmissions. Quality castors (2 swivel with brake). Lockable steel drawer

with ball bearing slides. High gloss enamel finish



MADE FOR THE

TRADE



22 Bin Parts Storage Rack

6053 TRADEQUIP

Working load capacity: 100kg 15 parts bins: 345x105x75mm (3kg load capacity)

4 parts bins: 345x140x150mm (5kg load capacity) parts bins: 345 x 205 x 150mm (8kg load capacity)

Swivel castor diameter: 100mm



36 Bin Parts Storage Rack

6054 TRADEQUIP Working load capacity: 200kg

15 parts bins: 345x105x75mm (3kg load lapacity) 12 parts bins: 345x140x150mm (5kg load lapacity)

9 parts bins: 345 x 205 x 150mm (9kg load lapacity)

Swivel castor diameter: 100mm 880L x 410W x 1705Hmm

MADE FOR THE

Inc. GST \$757.90

FEATURES

Sturdy nine-tier steel powder coated rack Zinc plated wire shelving with bin locating guides Quick & easy clip together adjustable shelves. Stackable bins made of moulded polypropylene Ideal for garage, workshop, office, shed Powder coat frame resists corrosion. Quality swivel castors (2x lockable) Convenient access to removable bins



Convenient access to removable bins





Mobile Workshop Table with Drawer

340x300x45mm drawer
Adjustable from 860-1200mm high
Includes drawer and top tray liner
80kg Distributed load capacity
730x500x25mm top tray

FEATURES

Height adjustable for most vehicles. Ball Bearing wheels for easy moving. Multi-functional top table with 3 compartments and 6 screwdriver holes. Top EVA mat for skid resistance. Extra drawer for more storage room.



Truck Mobile Workshop Table

BMWST BOR WORKSHOP EQUIPMENT
Safe working capacity: 34kg

Safe working capacity: 34kg Adjustable working height: 960-1500mm Distance between front casters: 955mm Caster wheel diameter: 75mm

Caster wheel diameter: 75mr Table top: 797L x 695W Main tray: 556L x 695W Depth at full width: 485mm Includes top tray liner





FEATURES

Height adjustable to most commercial vehicles. Smooth rolling casters. Extra wide legs to suit commercial vehicles. Multi-functional top table with 2 compartments and 8 screwdriver holes.

Top EVA mat for skid resistance. Protective bumper for top tray. Strong tubular steel construction. Sturdy main support post.



Workshop Trolley 2 Drawers & Lockable Sliding Top

6019T TRADEQUIP

Safe working capacity: 100kg Two lockable drawers & top 100mm composite rubber castors Two 75mm deep shelves 700L x 370W x 760Hmm



FEATURES

Heavy gauge steel construction with lockable sliding top.
Quality 35mm ball bearing sliding drawers, which are locked when top is closed.
Side handle for comfort/control when moving.
Toggh enamel finish.
Non slio rubber tool tray liners.

100kg Capacity

Inc. GST \$423.50

Workshop Trolley Single Drawer 6020T TRADEQUIP

Safe working capacity: 155kg Lockable drawer: 635L x 320W x 80Hmm Top storage tray: 695L x 405W x 65Hmm Lower storage tray: 750L x 395W x 68Hmm Rubber castors: 100Dmm 775L x 415D x 890Hmm



FEATURES

Heavy gauge steel construction with lockable drawer on smooth runners. Two top mounted handles for added control when manoeuvring. Tough enamel finish.

Non slip EVA foam tool tray liner. Two heavy-duty locking swivel casters for control and maneuverability.

Large top & bottom shelf giving extra clearance.



Workshop Trolley 4 Drawers with Lockable Top

6052 TRADEQUIP

Safe working capacity: 260kg 4 lockable drawers on 35mm ball bearing slides Two 75mm deep shelves for plenty of storage (one lockable)

Top 2 drawers (each): 310W x 370D x 50Hmm Middle drawer: 680W x 370D x 70Hmm Large drawer: 660W x 370D x 100Hmm

Two swivel and two fixed 100mm smooth rolling composite rubber castors. 850L x 445D x 972Hmm



FEATURES

Heavy gauge steel construction with lockable sliding top on smooth ball bearing runners.
Quality ball bearing slide drawers, that lock when top is closed. Side handle for comfort and control when manoeuvring. Tough high gloss enamel finish. Non slip rubber tool tray liners. Heavy-duty ergonomic grip handle. Two heavy-duty locking castors for control and stability.







Safe working capacity: 226kg Top tray: 778L x 415W x 63Hmm Tray capacity: 113kg (each) Smooth rolling rubber castors: 125D x 25Wmm Ground clearance: 140mm Weight: 14kg

Excludes GST Inc. GST \$273.90

Two deep shelves for plenty of storage. Will not dent, rust or chip. Convenient push handle Two swivel and two fixed smooth rolling rubber castors.

No painting required. Cleans easily. Virtually maintenance free.

Workshop Trolley (Polymer)

6045 TRADEQUIP Safe working capacity: 226kg 3 x 100mm deep shelves 125x30mm smooth rolling rubber swivel castors 75kg tool tray capacity 875L x 430W x 830Hmm

Inc. GST \$302.50

Excludes GST Capacity FEATURES Deep shelves for plenty of storage.
Will not dent, rust or chip. Convenient push handle.
Two swivel and two fixed smooth rolling rubber castors.
No painting required. Cleans easily. Virtually maintenance free.

Workshop Trolley 3 Tool Trays

6004 TRADEQUIP
the trusted brand in equipment

Safe working capacity: 150kg Powder coated .6mm steel 100mm composite castors 845L x 410W x 780Hmm

> Excludes GST Inc. GST \$196.90

FEATURES

This three shelf workshop tool trolley is durable enough for moving tools and car parts Deep shelves give you plenty of storage for your tools and parts.

Workshop Trolley 2 Tool Trays & 1 Drawer

6012T TRADEQUIP

Safe working capacity: 100kg One lockable drawer 100mm composite rubber castors Two 100mm deep shelves 770L x 370W x 830Hmm

> Excludes GST Inc. GST \$295.90

FEATURES

Heavy gauge steel construction Quality 35mm ball bearing slide drawer. Side handle for comfort and control Tough enamel finish.



MADE FOR THE



Workshop Trolley (Polymer) 6042T TRADEQUIP

Safe working capacity: 226kg Tray: 900L x 600W x 65Hmm Tray capacity: 113kg (each)

Smooth rolling rubber castors: 125D x 25Wmm Ground clearance: 140mm

Weight: 22kg

MADE FOR THE

MADE FOR THE

TRADE

2/2(5) KG MADE FOR THE

FEATURES

Two deep and wide shelves for plenty of storage.
Convenient push handle. Virtually maintenance free. Two swivel and two fixed smooth rolling rubber castors Will not dent, rust or chip. No painting required. Cleans easily.

Workshop Trolley (Polymer)

6043T TRADEQUIP Safe working capacity: 226kg Tray capacity: 76kg (each) Tray: 900L x 600W x 65Hmm

Smooth rolling rubber castors: 125D x 25Wmm

Ground clearance: 140mm Weight: 33.5kg

Excludes GST

Inc. GST \$372.90

Inc. GST \$427.90

MADE FOR THE

FFATURES Three deep and wide shelves for plenty of storage Convenient push handle. Virtually maintenance free.
Two swivel and two fixed smooth rolling rubber castors.
Will not dent, rust or chip. No painting required. Cleans easily.

Workshop Trolley (Polymer)

6046 TRADEQUIP

MADE FOR THE



Safe working capacity: 226kg 8 Parts bins 241x152x127mm 24 Parts bins 165x101x76mm 125x30mm rubber swivel castors 85kg tool tray capacity 1000L x 435W x 850Hmm

FEATURES

Deep shelves give you plenty of storage for your tools and parts. Industrial grade castors. Will not dent, rust or chip Convenient push handles.
No painting required. Cleans easily.



Excludes GST

Inc. GST \$416.90



LIGHT WEIGHT POLYMER

Self-Evacuating Oil Drainer 65 Litre 1046T TRADEQUIP

Capacity: 65 Litres Working height: 1080-1600mm

Discharge pressure: 12psi Telescopic adjustment Air inlet: 1/4" BSP

> AIR OPERATED

MADE FOR THE

FEATURES

Collect, transfer, evacuate used engine oils, transmission fluids, power steering fluids etc. Top quality heavy-gauge steel collection tank with adjustable telescopic drain Offset drain bowl and Tank

oil level indicator. Air pressure relief valve prevents.

Sturdy rubber front wheels and ball bearing-mounted rear castors provide stability and easy maneuverability. Lead-free paint is oil, grease and dirt-resistant. Oil, heat, ozone and abrasion resistant hose



Truck Fluid Drain Pan with Hand Pump 65 Litre

1147T TRADEQUIP Lightweight high-impact polypropylene. Oil and coolant resistant Manoeuvrable 4" castors Tank size: 1300x730x200mm

FEATURES

Lightweight high-impact polypropylene. Suitable for engine oil, coolant and transmission fluid.

Built-in rotary hand discharge pump. Removable metal filter screen Smooth rolling rubber castor wheels





Built-in rotary hand discharge pump



Truck Fluid Drain Pan 60 Litre

1146T TRADEQUIP

Capacity: 60 Litres Minimum height: 200mm Fnamel steel construction Oil and coolant resistant Size: 1174 x 641 x 200mm Front swivel castors



Excludes GST

Truck Fluid Drain Pan 95 Litre 1145T TRADEQUIP

Removable metal

Capacity: 95 Litres

Minimum height: 270mm Size: 1120L x 750W x 270Hmm

Enamelled steel construction. Oil and coolant resistant. Removable metal screen. Four swivel wheels, two which are braked. Handle can be mounted to

Removable metal filter



front or side.

Drain valve & Grab handle

screen



95 LITRE Capacity



Excludes GST

Inc. GST \$493.90

Excludes GST Inc. GST \$449.90

FEATURES

Enamelled steel construction Oil and coolant resistant. Removable metal screen. Two front swivel castors Two rear fixed wheels. Brass drain valve Transfer pump coupling.

Grab handle



Removable

metal filter

screen



EDGLE PRO

ABOUT EAGLE PRO HYDRAULICS

With nearly 3 decades experience of manufacturing hydraulic tools for industrial applications, Eagle Pro Hydraulics has become the trusted partners for applications spanning from offshore plant maintenance to mining, infrastructure, commercial and industrial. Eagle Pro Hydraulics are manufactured to ISO 9001:2018 through international quality assurance programs which involve consistent observation of administration, management, manufacturing and production control. Eagle Pro hydraulic cylinders meet or exceed ANSI B30.1. This results in reliable and dependable high-quality products you can count on every time.

ES SERIES

Single Acting General Purpose

Eagle Pro ES series redefines durability for the harshest of industrial environments with its high strength alloy steel construction. Hardened and chromed piston ensures superior product life by reducing wear and corrosion.

Eagle Pro ES series is not only durable, it gets the job done! Heavy-duty, straight pull return springs provide fast retraction. For greater flexibility and easy mounting, the ES series comes with collar, multiple piston threads, and base mounting holes. Hardened and E-coated snap-in type saddle prevents piston jamming and mushrooming, practically eliminating downtime. The female coupler comes with a dust cover – preventing dirt and debris from entering the hydraulic system.

The Eagle Pro ES series also complies with ASME B30.1 standard.



EDH SERIES

Double Acting Hydraulic

The Eagle Pro EDH series incorporates a hollow piston design that allows both pushing and pulling forces. The construction of high strength alloy steel maximizes durability. The EDH series' double acting operation ensures fast and controlled piston reaction time.

Accidental over-pressurization is prevented with a built-in safety valve. The collar, piston threads, and base mounting holes enable easy fixturing.



ED SERIES

Double Acting General Purpose

The Eagle Pro ED series produces fast and controlled piston contraction thanks to the double acting operation.

A built-in safety valve prevents accidental-over pressurization. Most models include collar, piston threads, and base mounting holes to make fixturing a simple task.

Piston jamming and mushrooming is prevented by the cylinder's hardened, and E-coated snap-in saddle. The ED series enhances durability with a hardened and chromed piston that reduces wear and corrosion. ED series cylinders are easy to move around the job site with the addition of carrying handles (and eyebolts on larger models) that ease positioning and carrying. A durable, anti-corrosive finish is added using an environmentally friendly coating process.





EDX SERIES

Double Acting High Tonnage

Eagle Pro EDX series maximizes durability with the use of a high strength alloy steel. The built-in safety valve prevents accidental over-pressurization. The EDX is easy to carry and position with the included eyebolts. Optional tilt saddles are also available. The hardened and chromed piston minimizes wear and corrosion damage. The incorporation of base mounting holes enables easy fixturing. An environmentally friendly coating process provides a highly durable finish.



EL SERIES

Single Acting With Locking Collars

The Eagle Pro EL series includes an alloy steel lock nut for mechanical load holding. The EL series is constructed of a high strength alloy steel to maximize durability. The hardened chrome piston reduces damage caused from wear and corrosion. The over flow port functions as a stroke limiter.

The EL series includes hardened grooved replaceable saddles. Composite bearings prevent metal-to-metal contact. Quick reaction times are obtained through with heavy-duty straight pull return springs. An environmentally friendly coating process produces a finish that further increases durability.



ESL SERIES

Low Profile And Pancake Style

Featuring a low-profile, or flat design, the Eagle Pro ESL series cylinder is an optimal choice for confined spaces. The hardened and chromed piston is constructed of high strength alloy steel that increases durability by reducing wear and corrosion.

The grooved piston end does not require a saddle and the inclusion of mounting holes permits easy fixturing.

Retraction time is quick thanks to the heavy duty, straight pull return springs. An environmentally friendly coating process is used to provide the durable anti-corrosion finish.



ESH SERIES

Single Acting Hollow Piston

The Eagle Pro ESH Series allows for both pushing and pulling by incorporating a hollow piston design. The heavy-duty return spring provides notoriously quick reaction times. Easy fixturing with the inclusion of collar threads.



EPA SERIES

Dual Speed Hand Pumps

The Eagle Pro EPA series hydraulic hand pumps are some of the most durable, powerful and reliable hand pumps in the industry today. The EPA series feature valve blocks that are machined from a single piece of high strength aircraft grade aluminum and high capacity reservoirs made from alloy steel* that maximizes durability. The EPA series hand pumps are compact and easy to carry around the job site. To get the job done faster, these powerful dual speed pumps offer some of the best flow rates in the industry. All of the EPA series hydraulic hand pumps feature an internal safety valve to prevent system damage.





TEAGLE PROPERTIES





| | | H I DRAULICS | | | | COMPATIBILITY CHART | | | |
|---------|----------------------------------|---|--------|-------------------------------|-----------------|---------------------|-------------------------|-----------------|------------------|
| Model | Description | Cylinder Capacity @ 10,000PSI (700 BAR) | Stroke | Cylinder Effective Area | Oil Capacity | Collapsed Height | Extended Height B | Price ex GST | Price inc GST |
| | | Metric Kg | MM | CM ² | CM ³ | MM | MM | | |
| ES-50 | SINGLE ACTING RAM | 5,000 | 16 | 7.1 | 11.4 | 42 | 58 | \$399.00 | \$438.90 |
| ES-51 | SINGLE ACTING RAM | 5,000 | 25 | 7.1 | 17.8 | 110 | 135 | \$489.00 | \$537.90 |
| ES-55 | SINGLE ACTING RAM | 5,000 | 127 | 7.1 | 90.2 | 215 | 342 | \$619.00 | \$680.90 |
| ESL-50 | SINGLE ACTING RAM PANCAKE STYLE | 5,000 | 6 | 7.1 | 4 | 33 | 39 | \$389.00 | \$427.90 |
| ES-1010 | SINGLE ACTING RAM | 10,000 | 257 | 14.5 | 372.65 | 349 | 606 | \$799.00 | \$878.90 |
| ES-102 | SINGLE ACTING RAM | 10,000 | 54 | 14.5 | 78.3 | 121 | 175 | \$489.00 | \$537.90 |
| ES-104 | SINGLE ACTING RAM | 10,000 | 105 | 14.5 | 152.25 | 171 | 276 | \$699.00 | \$768.90 |
| ES-106 | SINGLE ACTING RAM | 10,000 | 156 | 14.5 | 226.2 | 247 | 403 | \$799.00 | \$878.90 |
| ESL-100 | SINGLE ACTING RAM PANCAKE STYLE | 10,000 | 10 | 14.5 | 15 | 42 | 53 | \$569.00 | \$625.90 |
| ESL-101 | SINGLE ACTING RAM PANCAKE STYLE | 10,000 | 38 | 14.4 | 55 | 88 | 126 | \$599.00 | \$658.90 |
| ESH-121 | SINGLE ACTING RAM HOLLOW PISTON | 13,000 | 42 | 18.4 | 77.3 | 120 | 162 | \$969.00 | \$1065.90 |
| ES-1510 | SINGLE ACTING RAM | 15,000 | 254 | 21.2 | 538.48 | 373 | 627 | \$1099.00 | \$1208.90 |
| ES-1514 | SINGLE ACTING RAM | 15,000 | 356 | 21.2 | 754.72 | 474 | 830 | \$1199.00 | \$1318.90 |
| ES-152 | SINGLE ACTING RAM | 15,000 | 51 | 21.2 | 108.12 | 149 | 200 | \$759.00 | \$834.90 |
| ES-154 | SINGLE ACTING RAM | 15,000 | 101 | 21.2 | 214.12 | 200 | 301 | \$929.00 | \$1021.90 |
| ESH-206 | SINGLE ACTING RAM HOLLOW PISTON | 20,000 | 49 | 32.8 | 161 | 162 | 211 | \$1749.00 | \$1923.90 |
| ESL-200 | SINGLE ACTING RAM PANCAKE STYLE | 20,000 | 11 | 28.3 | 31 | 51 | 62 | \$699.00 | \$768.90 |
| ESL-201 | SINGLE ACTING RAM PANCAKE STYLE | 20,000 | 45 | 28.3 | 127 | 98 | 143 | \$769.00 | \$845.90 |
| ES-251 | SINGLE ACTING RAM | 25,000 | 26 | 33.2 | 86.32 | 139 | 165 | \$999.00 | \$1098.90 |
| ES-252 | SINGLE ACTING RAM | 25,000 | 50 | 33.2 | 166 | 165 | 215 | \$1079.00 | \$1186.90 |
| ES-254 | SINGLE ACTING RAM | 25,000 | 102 | 33.2 | 338.64 | 215 | 317 | \$1179.00 | \$1296.90 |
| ES-256 | SINGLE ACTING RAM | 25,000 | 158 | 33.2 | 524.56 | 273 | 431 | \$1349.00 | \$1483.90 |
| ESH-302 | SINGLE ACTING RAM HOLLOW PISTON | 30,000 | 64 | 48 | 307 | 179 | 242 | \$1888.00 | \$2076.80 |
| ESH-306 | SINGLE ACTING RAM HOLLOW PISTON | 30,000 | 156 | 48 | 744 | 330 | 485 | \$2599.00 | \$2858.90 |
| ESL-300 | SINGLE ACTING RAM PANCAKE STYLE | 30,000 | 13 | 41.8 | 54 | 58.5 | 71 | \$1055.00 | \$1160.50 |
| ESL-302 | SINGLE ACTING RAM PANCAKE STYLE | 30,000 | 62 | 41.8 | 259 | 117 | 179 | \$979.00 | \$1076.90 |
| EL-506 | SINGLE ACTING RAM LOCKING COLLAR | 50,000 | 150 | 70.8 | 1062 | 264 | 414 | \$1929.00 | \$2121.90 |
| ES-502 | SINGLE ACTING RAM | 50,000 | 51 | 70.9 | 361.59 | 176 | 227 | \$1229.00 | \$1351.90 |
| ES-506 | SINGLE ACTING RAM | 50,000 | 159 | 70.9 | 1127.31 | 282 | 441 | \$1699.00 | \$1868.90 |
| ESL-500 | SINGLE ACTING RAM PANCAKE STYLE | 50,000 | 16 | 63.6 | 102 | 67 | 83 | \$979.00 | \$1076.90 |
| ESL-502 | SINGLE ACTING RAM PANCAKE STYLE | 50,000 | 60 | 63.6 | 382 | 122 | 182 | \$1199.00 | \$1318.90 |
| ESH-603 | SINGLE ACTING RAM HOLLOW PISTON | 60,000 | 76 | 87.4 | 664 | 247 | 322 | \$3199.00 | \$3518.90 |
| EL-1002 | SINGLE ACTING RAM LOCKING COLLAR | 100,000 | 50 | 132.7 | 663.5 | 187 | 237 | \$2399.00 | \$2638.90 |
| | | | | | | | | | |



| | | | Cylinder Capacity | | Max. Cylind | der Capacity | Cylinder Effective Area | | Oil Capacity | | | |
|----|---------|---------------------------------|-------------------|--------|-------------|--------------|-------------------------|-----------------|-----------------|-----------------|-----------|-----------|
| | Model | Description | @ 10,000PSI | Stroke | Advance | Retract | Advance | Retract | Advance | Retract | Price | Price |
| | | | (700 BAR) | | | | | 71007000 | | | ex GST | inc GST |
| | | | Metric Kg | MM | METRIC TON | METRIC TON | CM ² | CM ² | CM ³ | CM ³ | | |
| E | DX-506 | DOUBLE ACTING RAM | 50,000 | 150 | 53 | 26 | 75.4 | 36.9 | 1,131 | 1,131 | \$1799.00 | \$1978.90 |
| EC | X-1006T | DOUBLE ACTING RAM | 100,000 | 150 | 93 | 43 | 132.7 | 61.9 | 1,991 | 928 | \$2549.00 | \$2803.90 |
| Е | DH-307 | DOUBLE ACTING RAM HOLLOW PISTON | 30,000 | 178 | 33 | 22 | 47.7 | 32.4 | 849 | 577 | \$2249.00 | \$2473.90 |
| Е | DH-603 | DOUBLE ACTING RAM HOLLOW PISTON | 60,000 | 89 | 60 | 39 | 87.4 | 56.2 | 778 | 481 | \$2549.00 | \$2803.90 |
| Е | DH-606 | DOUBLE ACTING RAM HOLLOW PISTON | 60,000 | 166 | 60 | 39 | 87.4 | 56.2 | 1451 | 891 | \$3199.00 | \$3518.90 |
| E | ED-1012 | DOUBLE ACTING RAM | 10,000 | 305 | 10 | 3 | 14.5 | 4.9 | 443 | 149.5 | \$1799.00 | \$1978.90 |

| | Description | Cylinder Type | Speed | Usable Oil | Pressure Rating | | Oil Displacement Per Stroke | | Handle | | |
|------------|------------------------------------|---------------|-------|-----------------|-----------------|-----------|-----------------------------|-----------------|--------|-----------------|------------------|
| Model | | | | Volume | 1st Stage | 2nd stage | 1st Stage | 2nd Stage | Force | Price ex GST | Price inc GST |
| | | | | CM ³ | BAR | BAR | CM ³ | CM ³ | KG | EX 031 | IIIC UST |
| EPA-10921A | HAND PUMP, S/A, TWO SPEED, 55 IN3 | SINGLE ACTING | TWO | 750 | 25 | 700 | 33 | 3.3 | 49 | \$699.00 | \$768.90 |
| EPA-12321A | HAND PUMP, S/A, TWO SPEED, 140 IN3 | SINGLE ACTING | TWO | 2300 | 25 | 700 | 33 | 3.3 | 49 | \$1019.00 | \$1120.90 |
| EPA-12322A | HAND PUMP, D/A, TWO SPEED, 140 IN3 | DOUBLE ACTING | TWO | 2300 | 25 | 700 | 33 | 3.3 | 49 | \$1349.00 | \$1483.90 |

| Model | Description | Internal Diameter | Length | Hose | Working Pressure | Burst Pressure | Hose End Configuration | | Price | Price | |
|----------|--|-------------------|--------|----------|------------------|----------------|------------------------|--------------|----------|----------|--|
| Model | | MM | MM | Material | PSI | PSI | Pump End | Cylinder End | ex GST | inc GST | |
| EH-8206F | 1/4" IDX6' RBR HYDHOSE 3/8" NPT EAB-201B | 6 | 1800 | - | 10,000 | 20,000 | 3/8" NPT | 3/8" NPT | \$199.00 | \$218.90 | |

| \ | Model | Description | Max. Pressure Type Thread | | Female Coupler | Male Coupler | Price | Price | |
|---|---------|----------------------------------|---------------------------|-----------|----------------|----------------|--------------|---------|---------|
| | Model | Description | PSI | туре | | remale coupler | Male Couplet | ex GST | inc GST |
| | EAB-201 | 3/8" MALE/FEMALE HIGH FLOW QUICK | 10,000 | HIGH FLOW | 3/8" - 18NPT | EAB-201A | EAB-201B | \$85.00 | \$93.50 |

| | Model | Description | Pressure Range | | Thread | Gauge Diameter Price | | Price | |
|--|---------|-----------------------------------|----------------|---------|------------|----------------------|------------|----------|-----|
| | | Description | PSI | MPa | IN | | ex GST inc | | GST |
| | EG-2510 | 2.5 IN. 15,000 PSI PRESSURE GAUGE | 0 - 15,000 | 0 - 100 | 1/4" - NPT | 2.5 | \$239.00 | \$262.90 | |

| | Model | Description | Male Coupler Thread | Female Coupler Thread Gauge Port Thread | | Price | Price |
|---|---------|---------------|---------------------|---|------------|---------|---------|
| ı | | | IN/D | IN/E | IN/C | ex GST | inc GST |
| | EGA-005 | GAUGE ADAPTOR | 3/8" - NPT | 3/8" - NPT | 1/4" - NPT | \$89.00 | \$97.90 |

| | Model | Description | Cylinder Capacity @ 10,000 PSI (700 BAR) | Oil Capacity | Tip Clearance | Maximum Spread Distance | Cylinder Effective Area | Weight | Price ex GST | Price inc GST |
|--|--------|---------------------------|---|-----------------|------------------|----------------------------|----------------------------|--------|-----------------|------------------|
| | | | US TON | CM ³ | MM/A | MM/B | CM ² | KGS | ex GST | |
| | EFS-14 | 14 TON HYDRAULIC SPREADER | 14 | 78.33 | 6.09 | 81.02 | 14.51 | 7.17 | \$2389.00 | \$2627.90 |



PORTABLE EVAPORATIVE COOLING

FIND OUT MORE ABOUT TOB BRANDS LATEST OFFERING HERE....



These **eQuipt Portable Evaporative Cooling** units are specifically designed for smaller workspaces, offering an impressive air flow capacity.

These user-friendly units feature a robust, weather resistant molded polyethylene housing that is both crack- and leak-resistant.

Equipped with a three-speed fan, these coolers efficiently circulate warm air over rigid, water saturated evaporative cooling media, resulting in a notable reduction in ambient temperatures of up to 10°C.

The adjustable swing louvre feature allows for customizable directional air flow, enabling users to tailor the cooled air output to their preferences.







eQuipt

Portable Evaporative Cooler 150W

E11-0010

240V/50Hz/150W 3 speed motor Max. air flow: 6,000 m³ per hour Water consumption: 4-5 litres per hour Effective cooling area: 45-55sqm Water tank capacity: 45 Litres Dimensions: 1185H x 650W x 430Dmm Weight: 17kg

eQuipt

Portable Evaporative Cooler 200W

E11-0020

240V/50Hz/200W 3 speed motor Max. air flow: 9,000 m³ per hour Water consumption: 5-6 litres per hour Effective cooling area: 60-70sqm Water tank capacity: 70 Litres Dimensions: 1360H x 820W x 545Dmm Weight: 35kg

eQuipt

Portable Evaporative Cooler 450W

E11-0030

240V/50Hz/450W 3 speed motor Max. air flow: 12,000 m3 per hour Water consumption: 8-10 litres per hour Effective cooling area: 70-90sqm Water tank capacity: 60 Litres Dimensions 1430H x 900W x 560Dmm Weight: 45kg